

SINGLE VANE PUMPS V10/20 V210/V230



Your Source for High Quality Pumps and Motors



SINGLE VANE PUMPS

V10/V20 - V210/V230

- * High Performance
- * Low Cost
- * Extended Life
- * Versatile
- * Compact
- * Quiet Operation
- * Balanced Cartridge Design

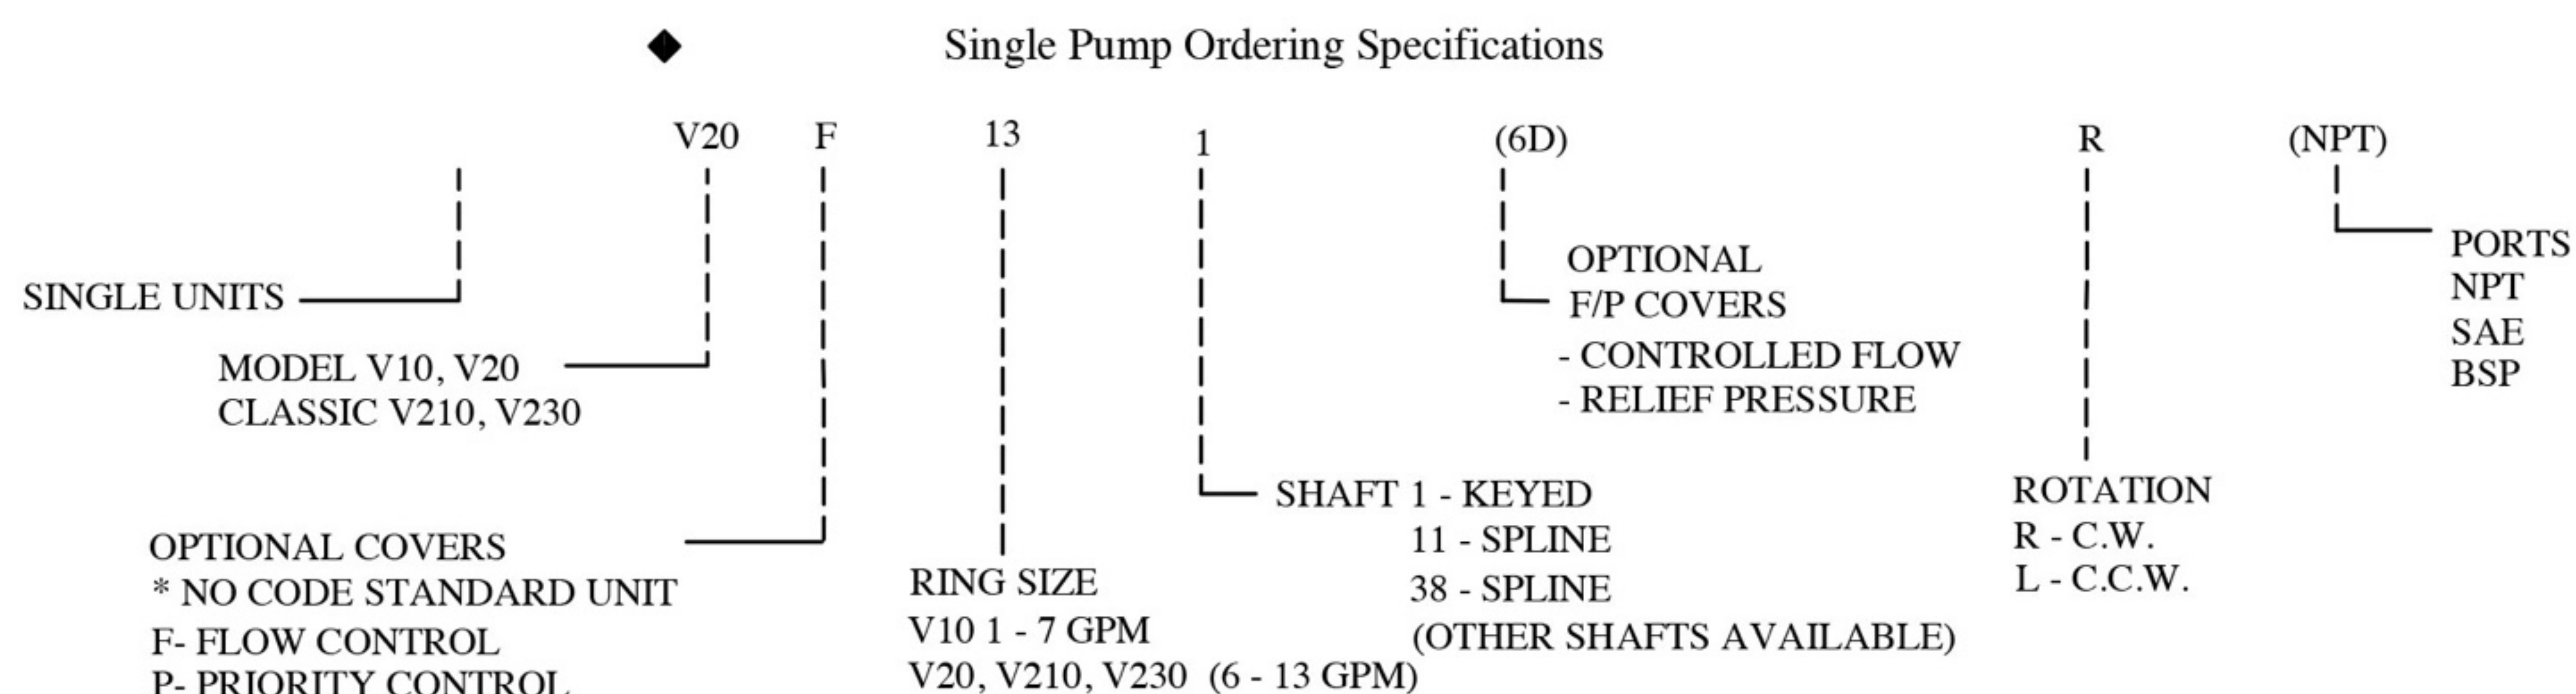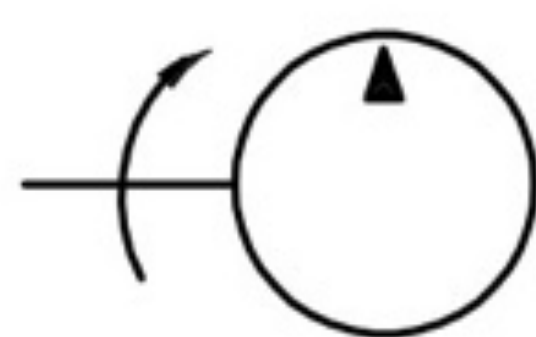

Values based on using anti-wear type petroleum oil 150 SUS at 100°F and 0 PSI inlet pressure.

MODEL SERIES	RING SIZE (DELIVERY USgpm @ 1200 R/MIN & 100 PSI)	DISPL. in ³ /r	MAXIMUM SPEED (RPM)	MAXIMUM PRESSURE (PSI)	TYPICAL DELIVERY (USgpm) @max.speed & pressure	TYPICAL INPUT POWER (HP) @max. speed & pressure	WEIGHT (lbs.)
V10	1	0.20	4800	2500	3.60	07.0	(10 - 15)
	2	0.40	4500	2500	7.30	13.6	
	3	0.60	4000	2500	9.40	17.8	
	4	0.80	3400	2500	10.9	20.4	
	5	1.00	3200	2500	12.8	22.8	
	6	1.19	3000	2500	14.6	26.0	
	7	1.39	2800	2500	16.0	28.0	
V20 V210 V230	6	1.19	3400	2500	16.1	29.0	(16 - 18)
	7	1.39	3000	2500	16.7	29.5	
	8	1.62	2800	2500	17.7	32.5	
	9	1.80	2800	2500	19.8	35.5	
	11	2.22	2500	2500	22.9	37.5	
	12	2.38	2400	2500	23.0	38.5	
	13	2.59	2400	2500	25.9	42.0	

offers a complete line of economical high performance fixed displacement vane pumps providing flows up to 26 US GPM for mobile and industrial applications. Balanced vane design provides quiet operation, high efficiency and long service life for the toughest applications. Units are designed for use with oil or synthetic fire resistant fluid. A large combination of Spline/Keyed Shafts and factory tested cartridges are available for fast, easy conversion and repair. Units are self-priming. However, before starting, fill the pump with system fluid through uppermost port. The housing must be kept full at all times to provide internal lubrication.






V10 SINGLE VANE PUMP INSTALLATION DIMENSION

DIMENSION (inches)

DELIVERY @ 1200 RPM & 100 PSI	DIMENSION		
	A	B	C
1 GPM	4.55	3.62	2.65
2 GPM	4.55	3.62	2.65
3 GPM	4.55	3.62	2.65
4 GPM	4.80	3.87	2.90
5 GPM	4.85	3.87	2.90
6 GPM	5.00	4.07	3.10
7 GPM	5.00	4.07	3.10

Weight 10 - 15 lbs
Pressure: 1/2" NPT
Suction: 1" NPT
Optional BSPT/SAE Ports available.

V10 series Optional Shafts

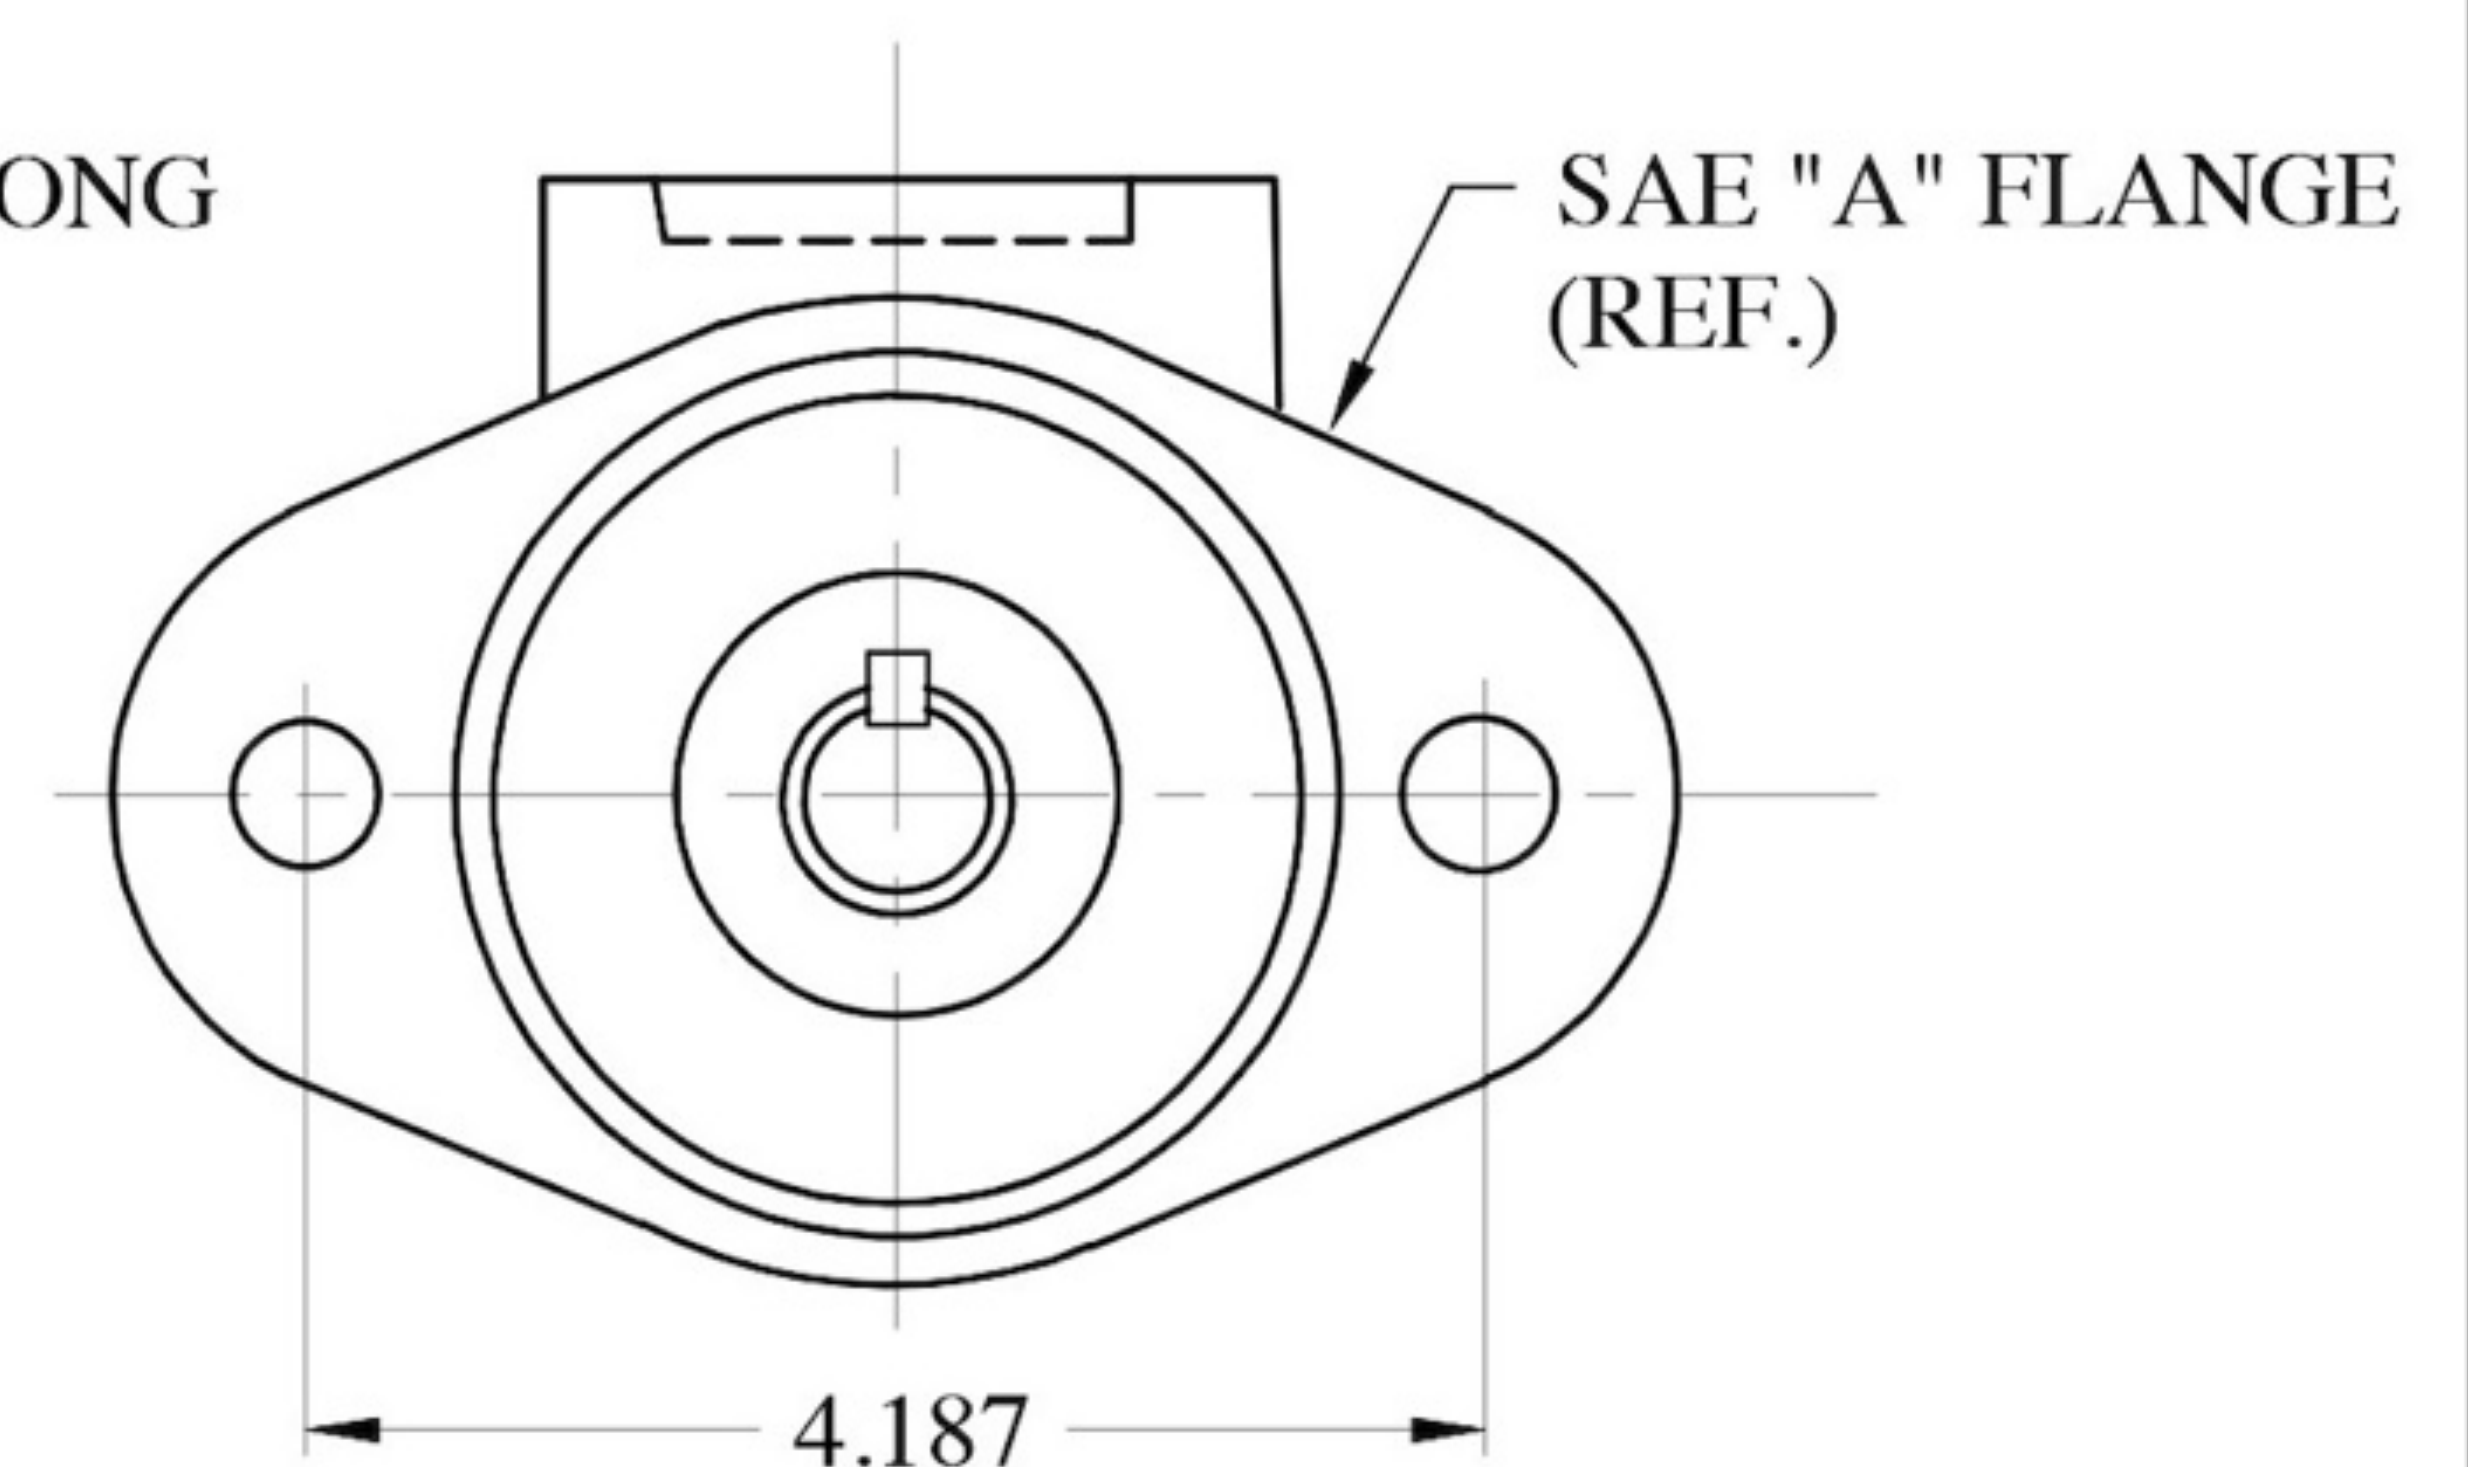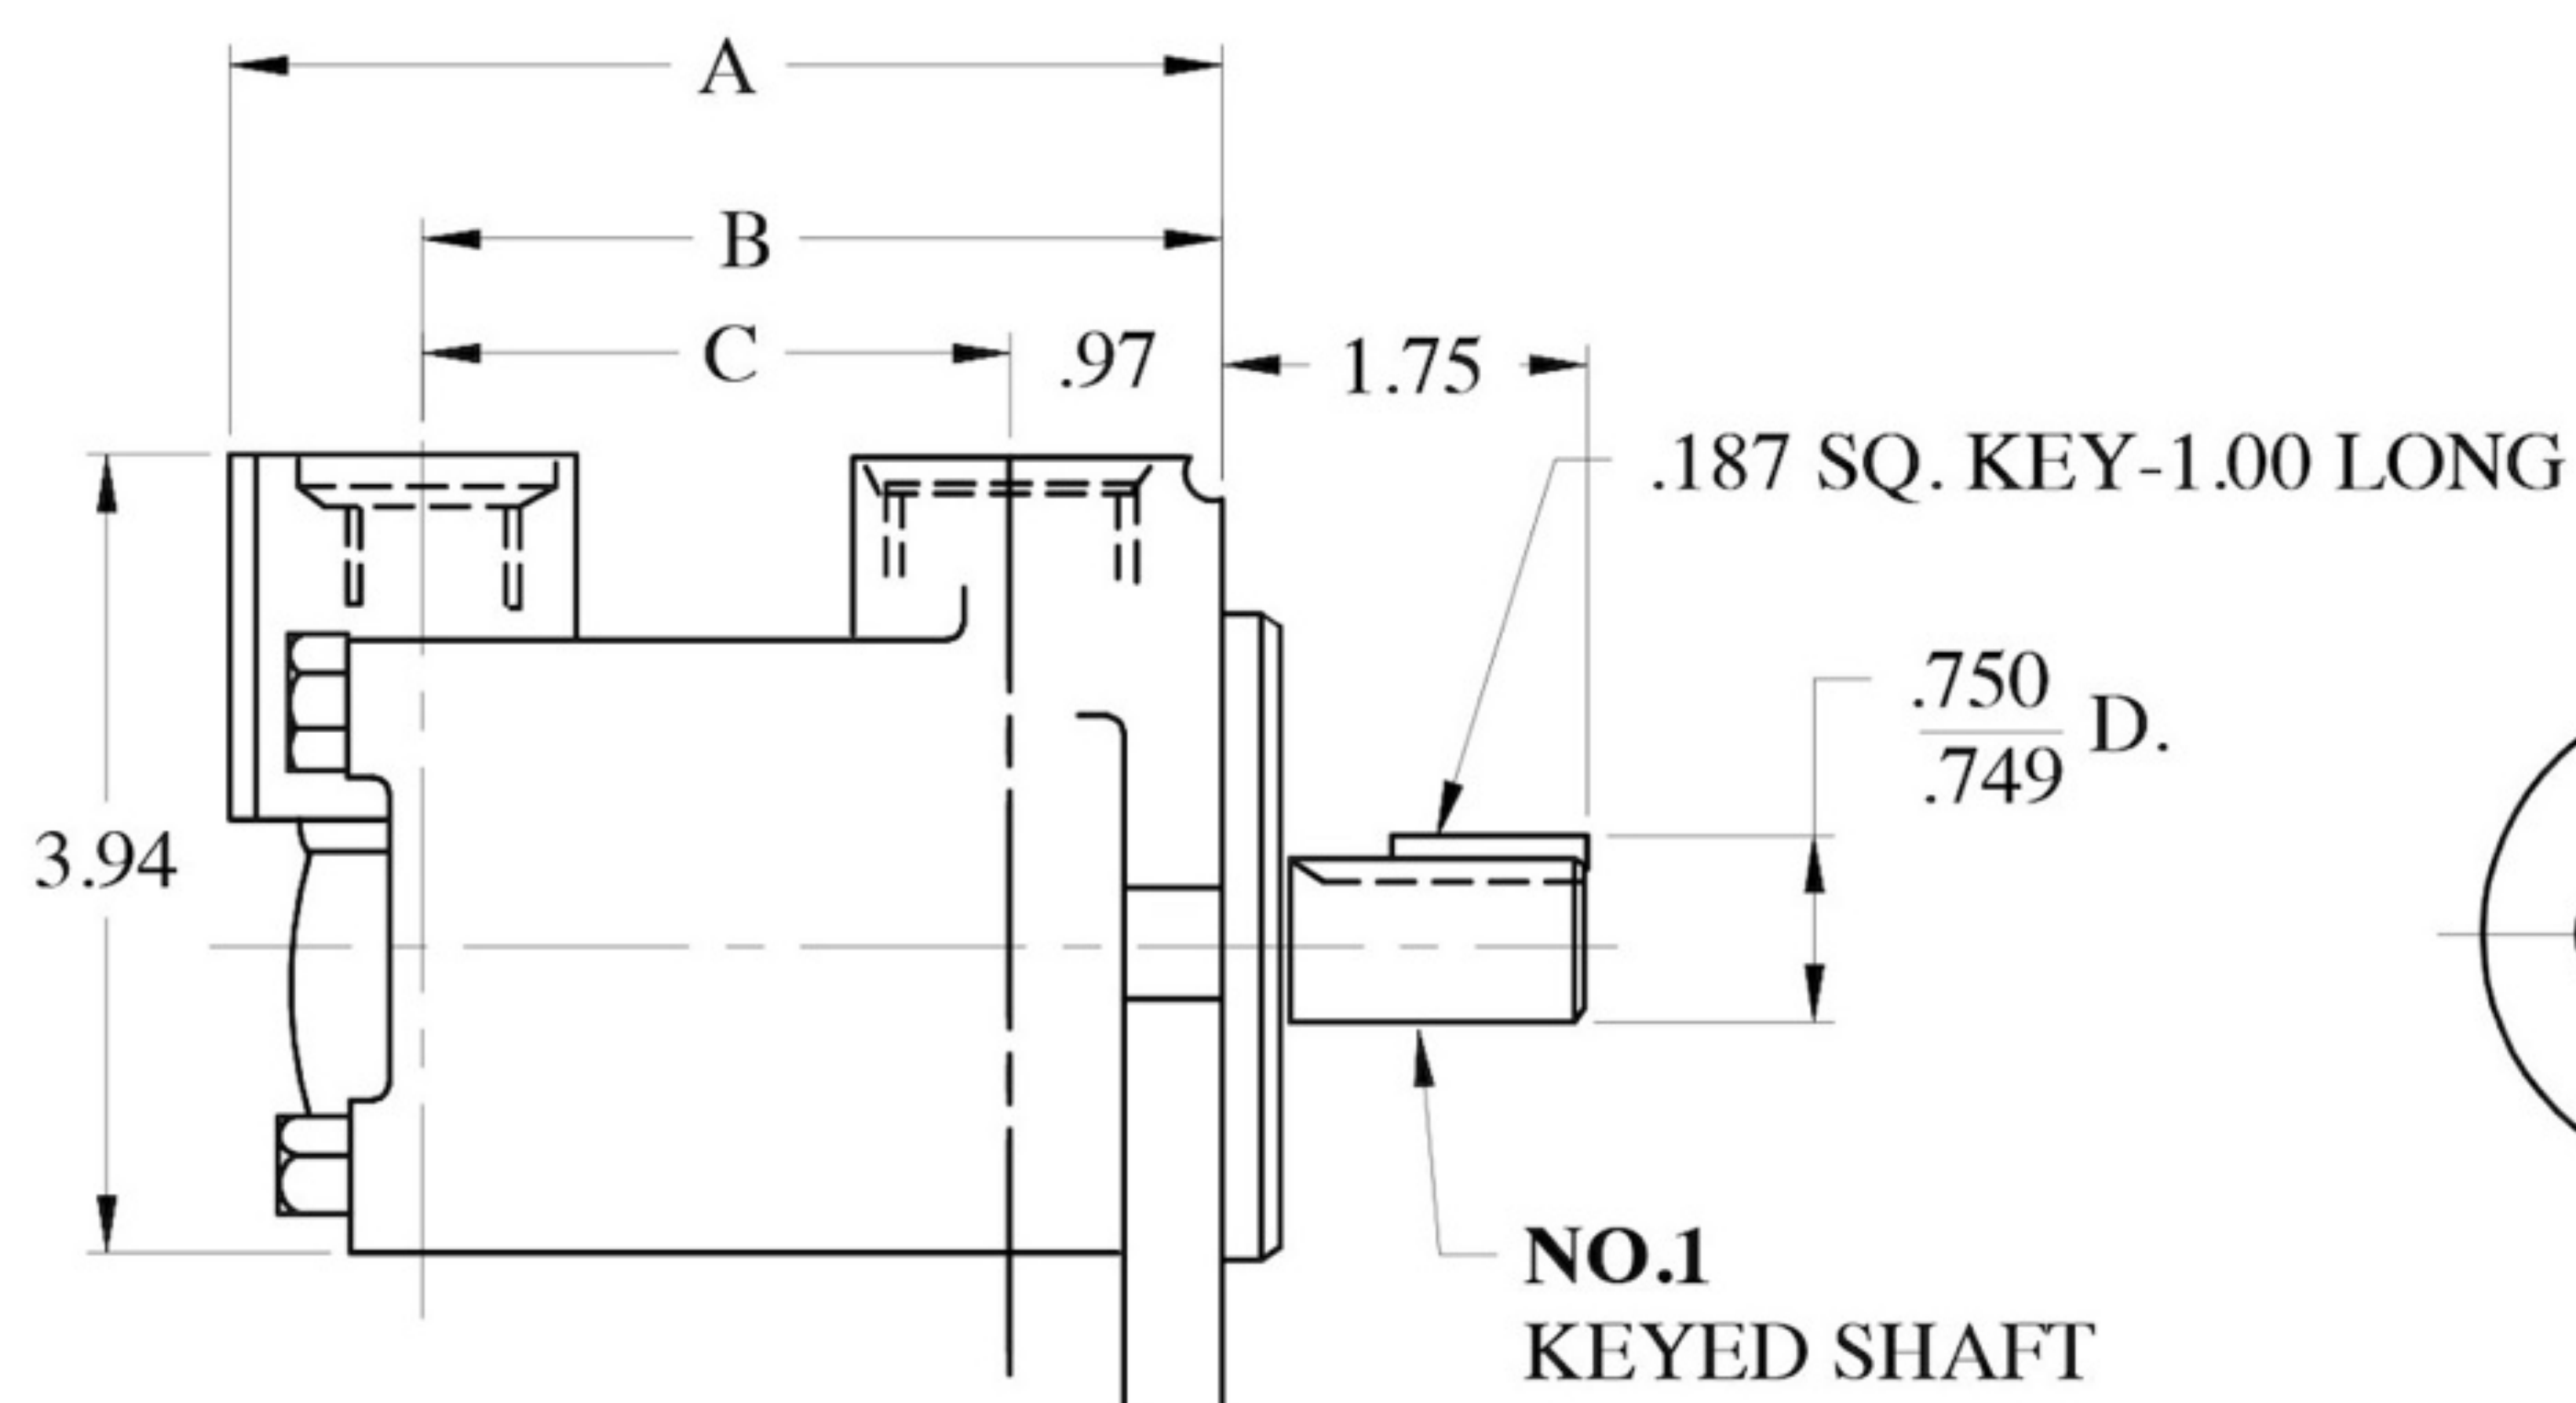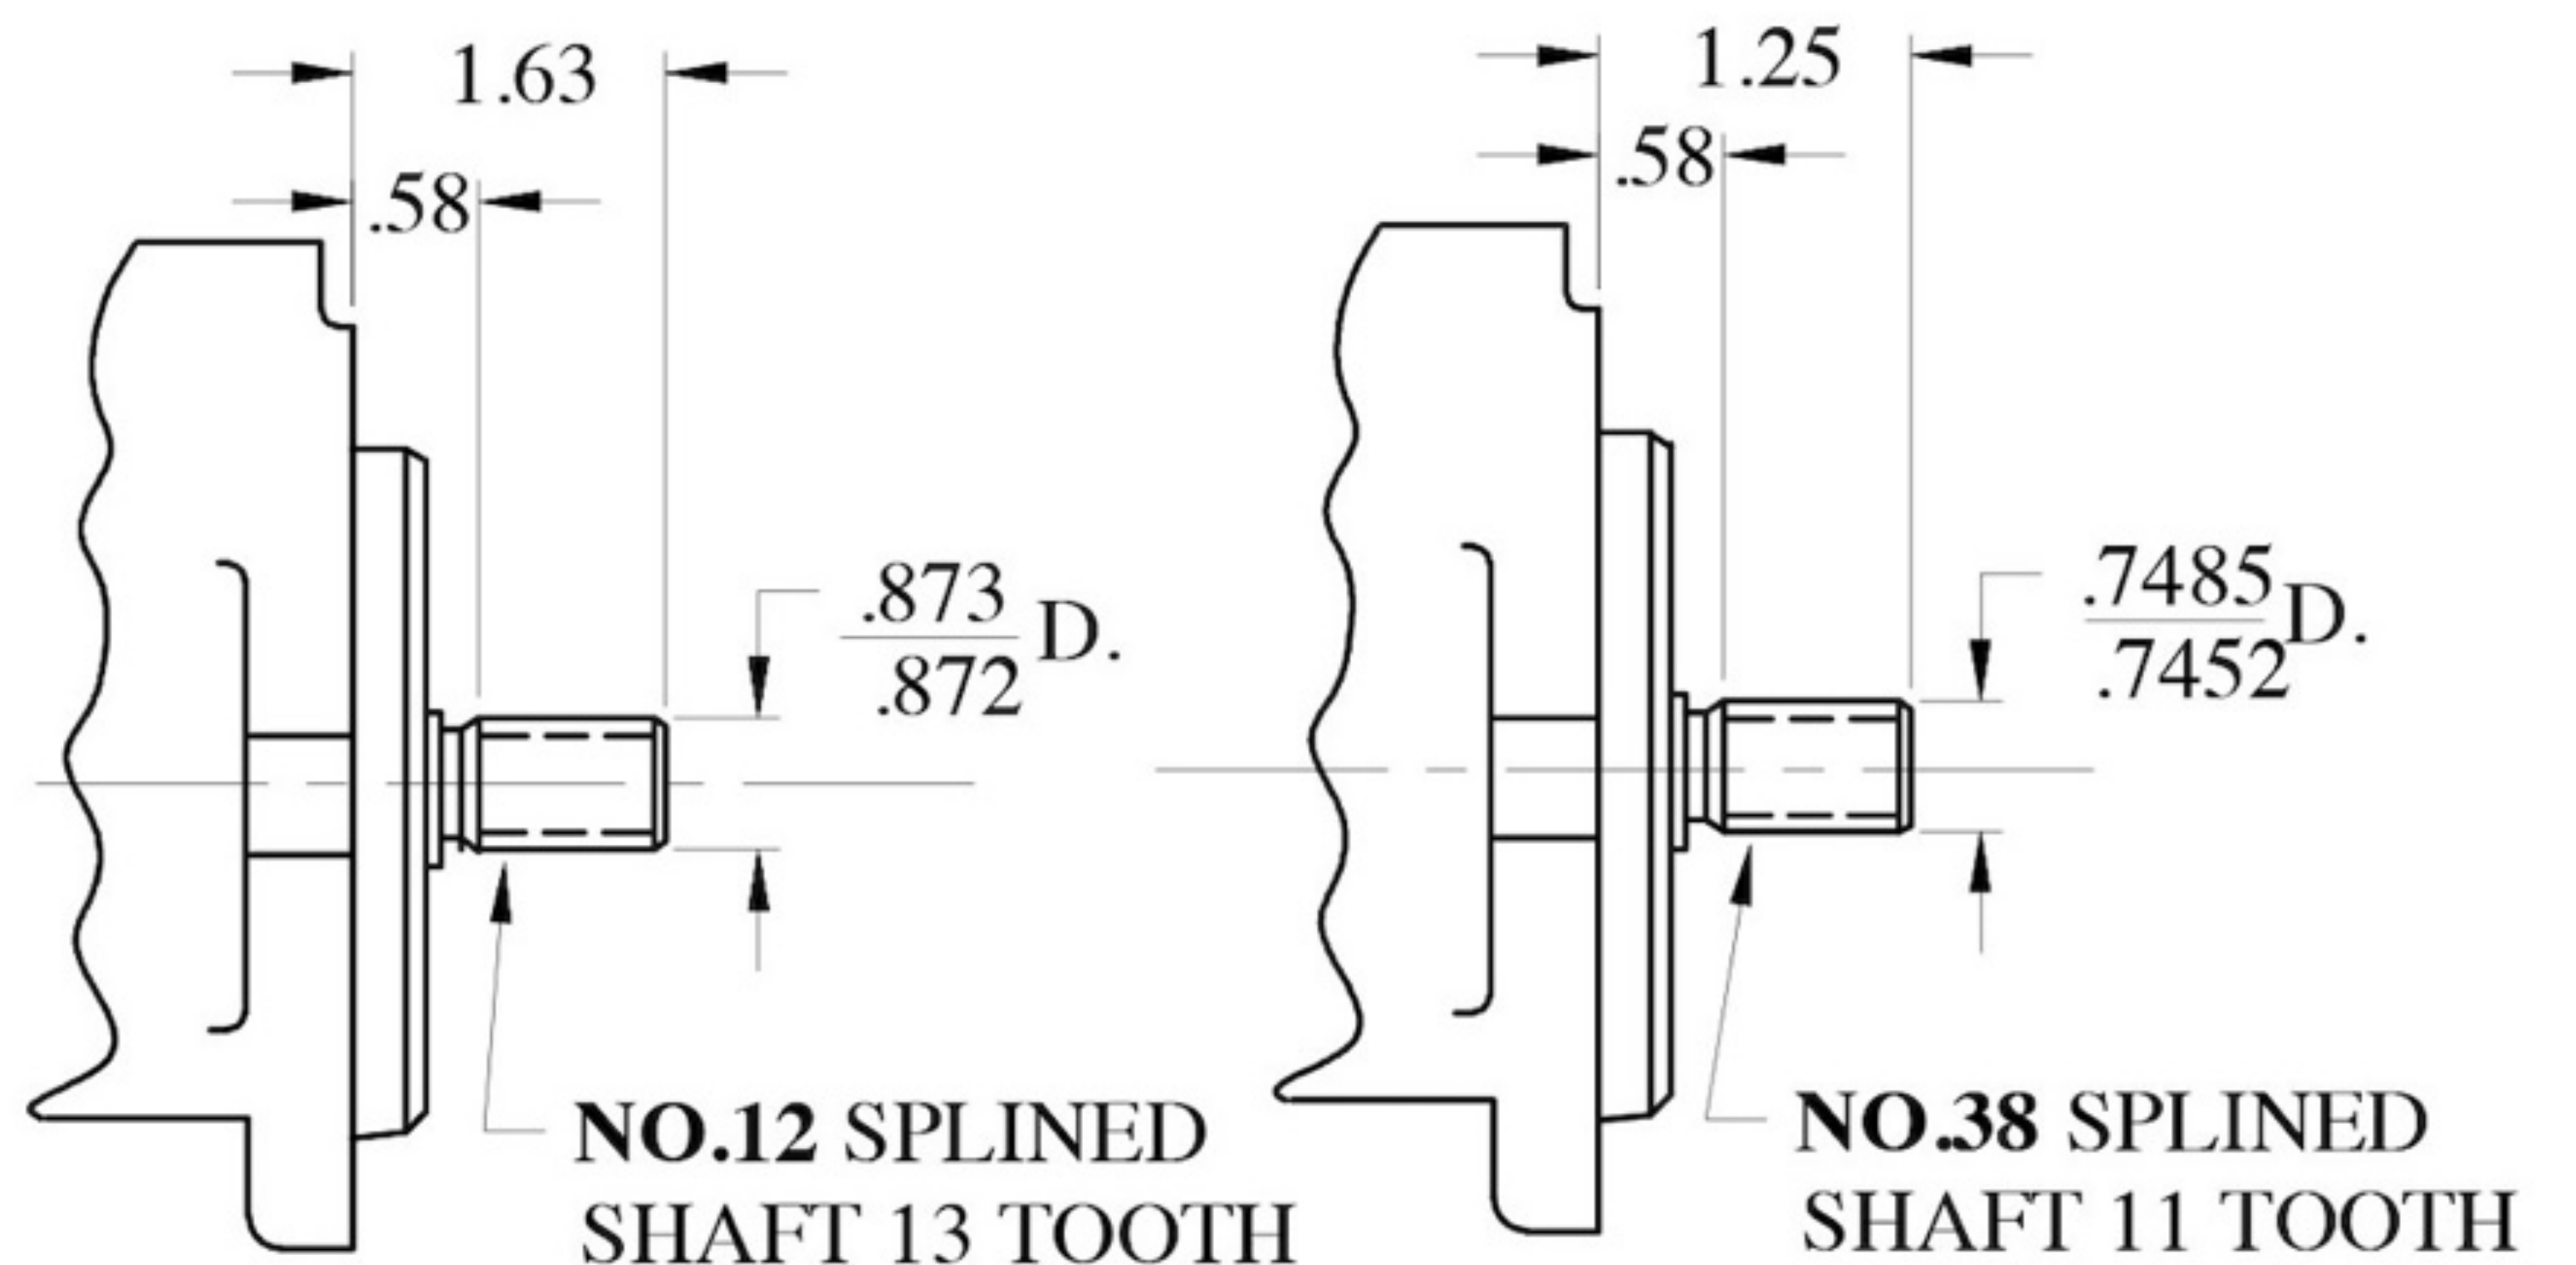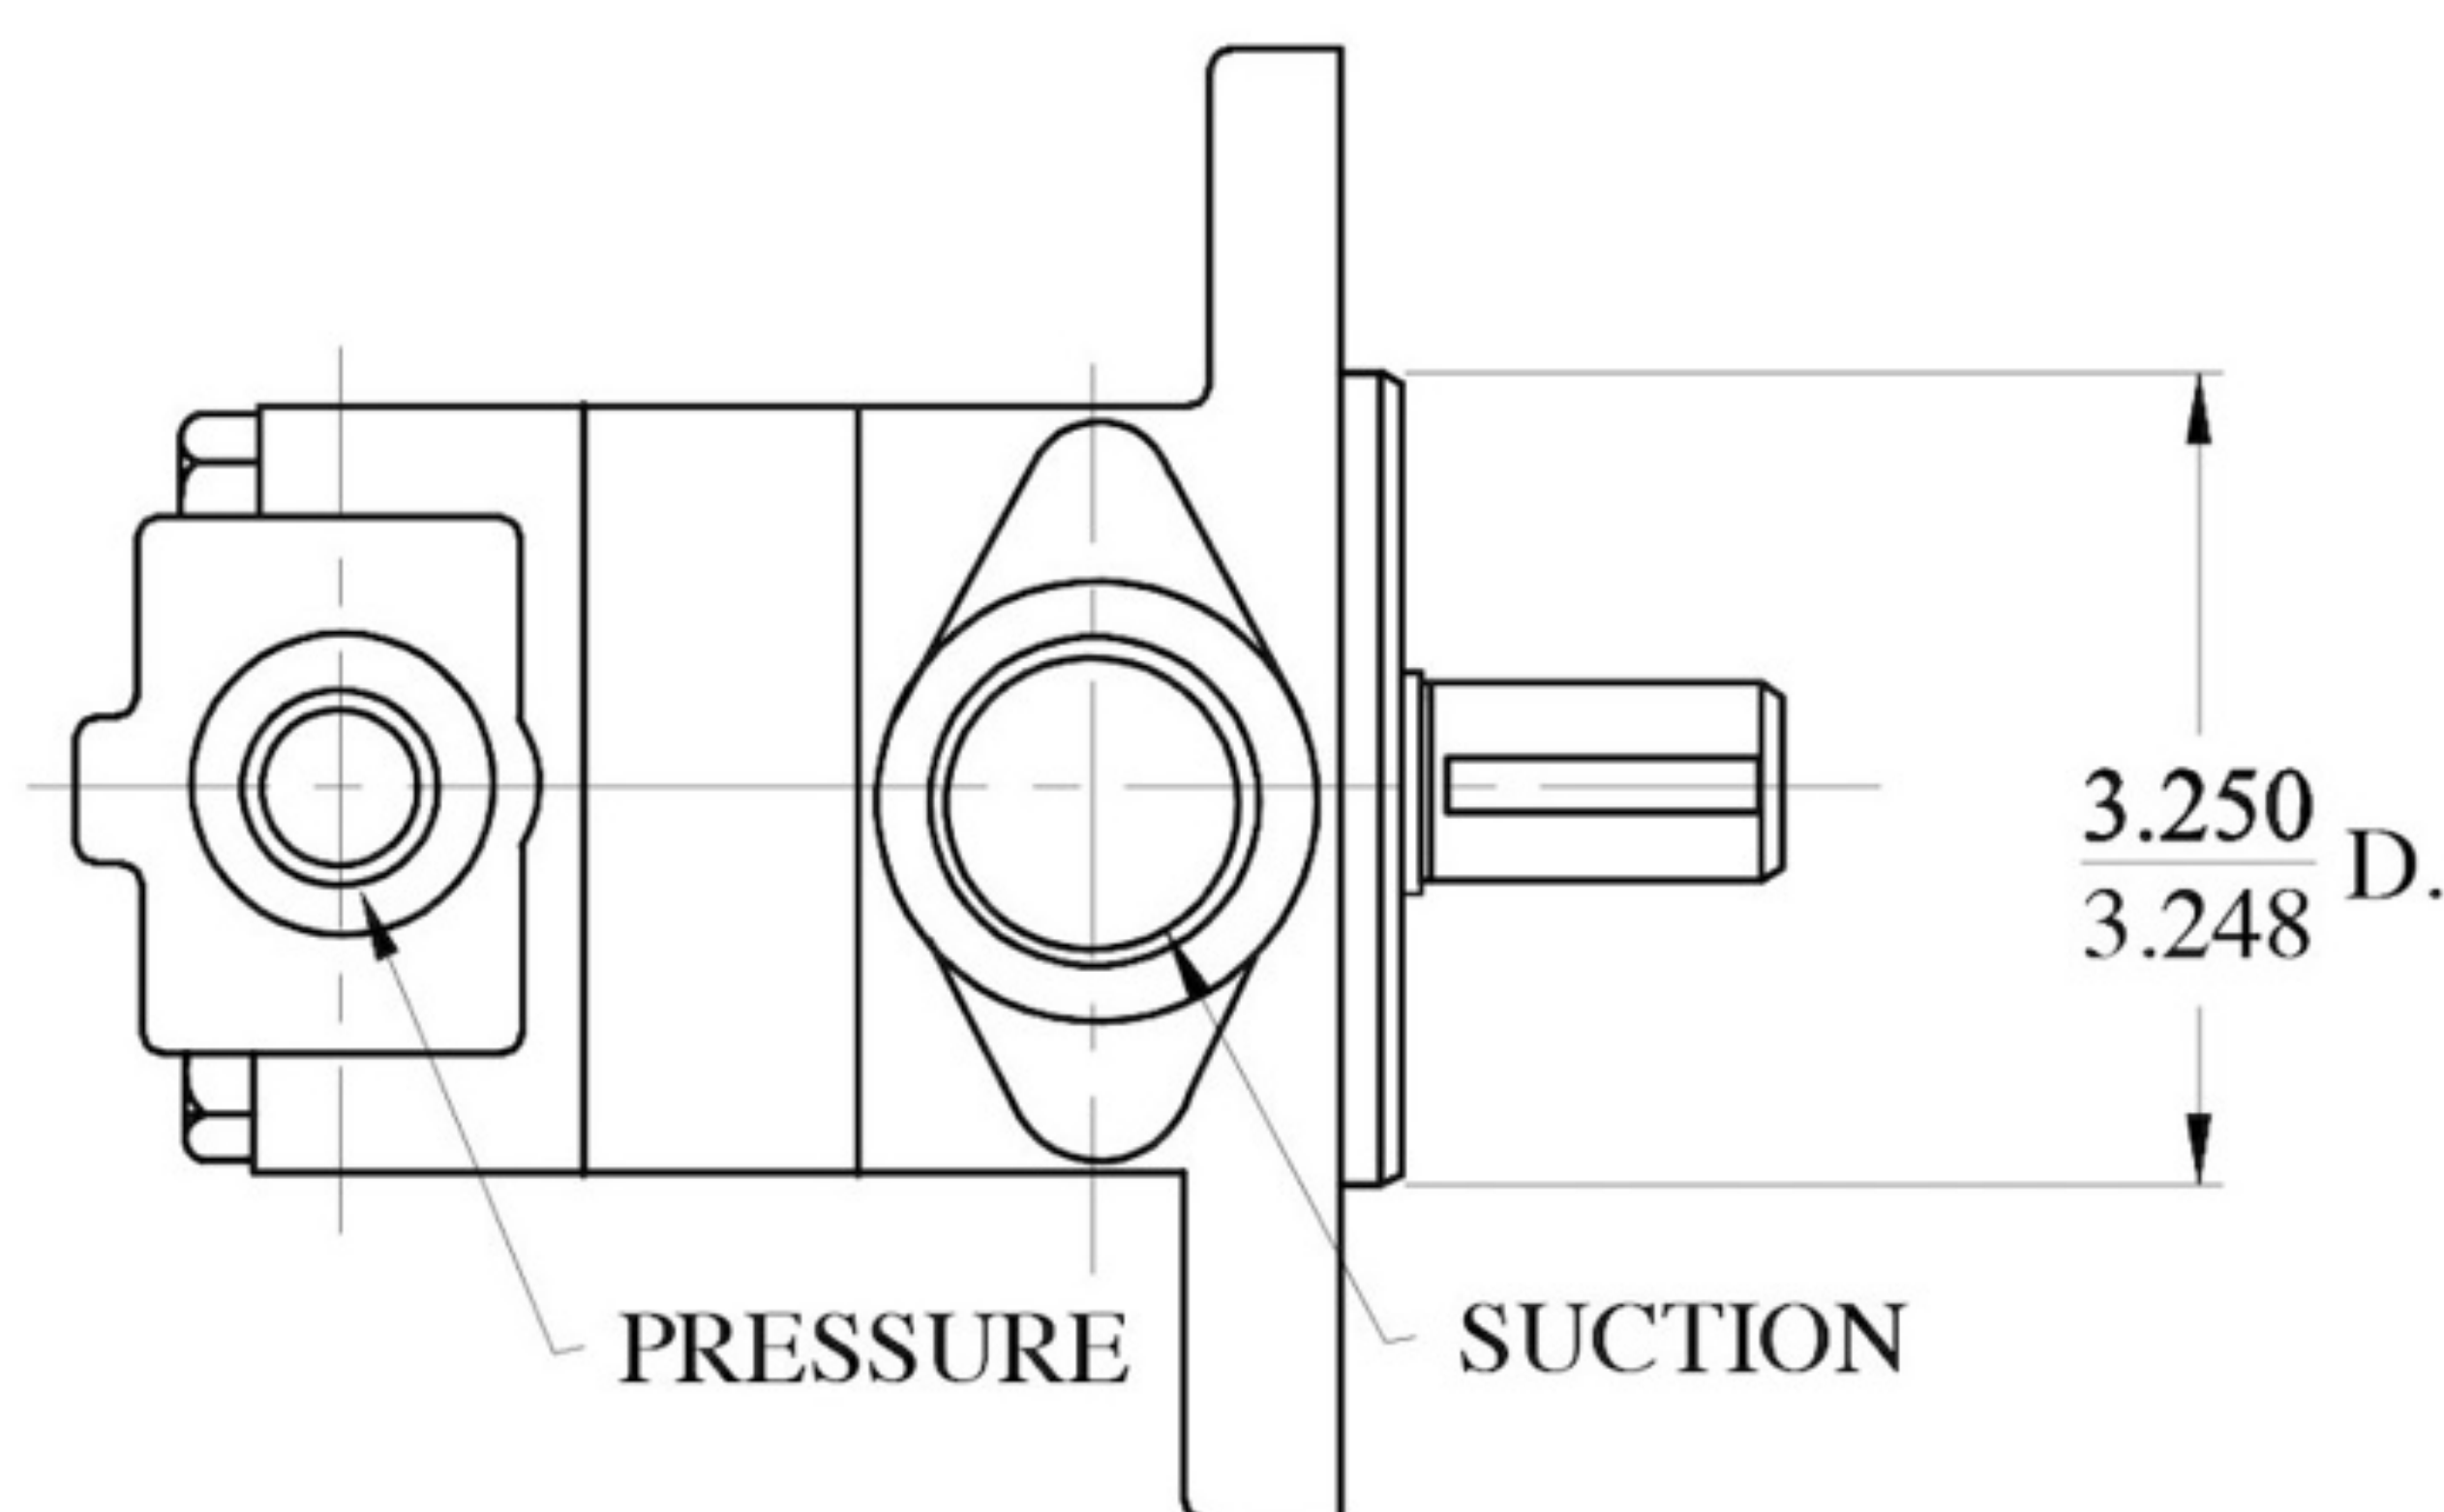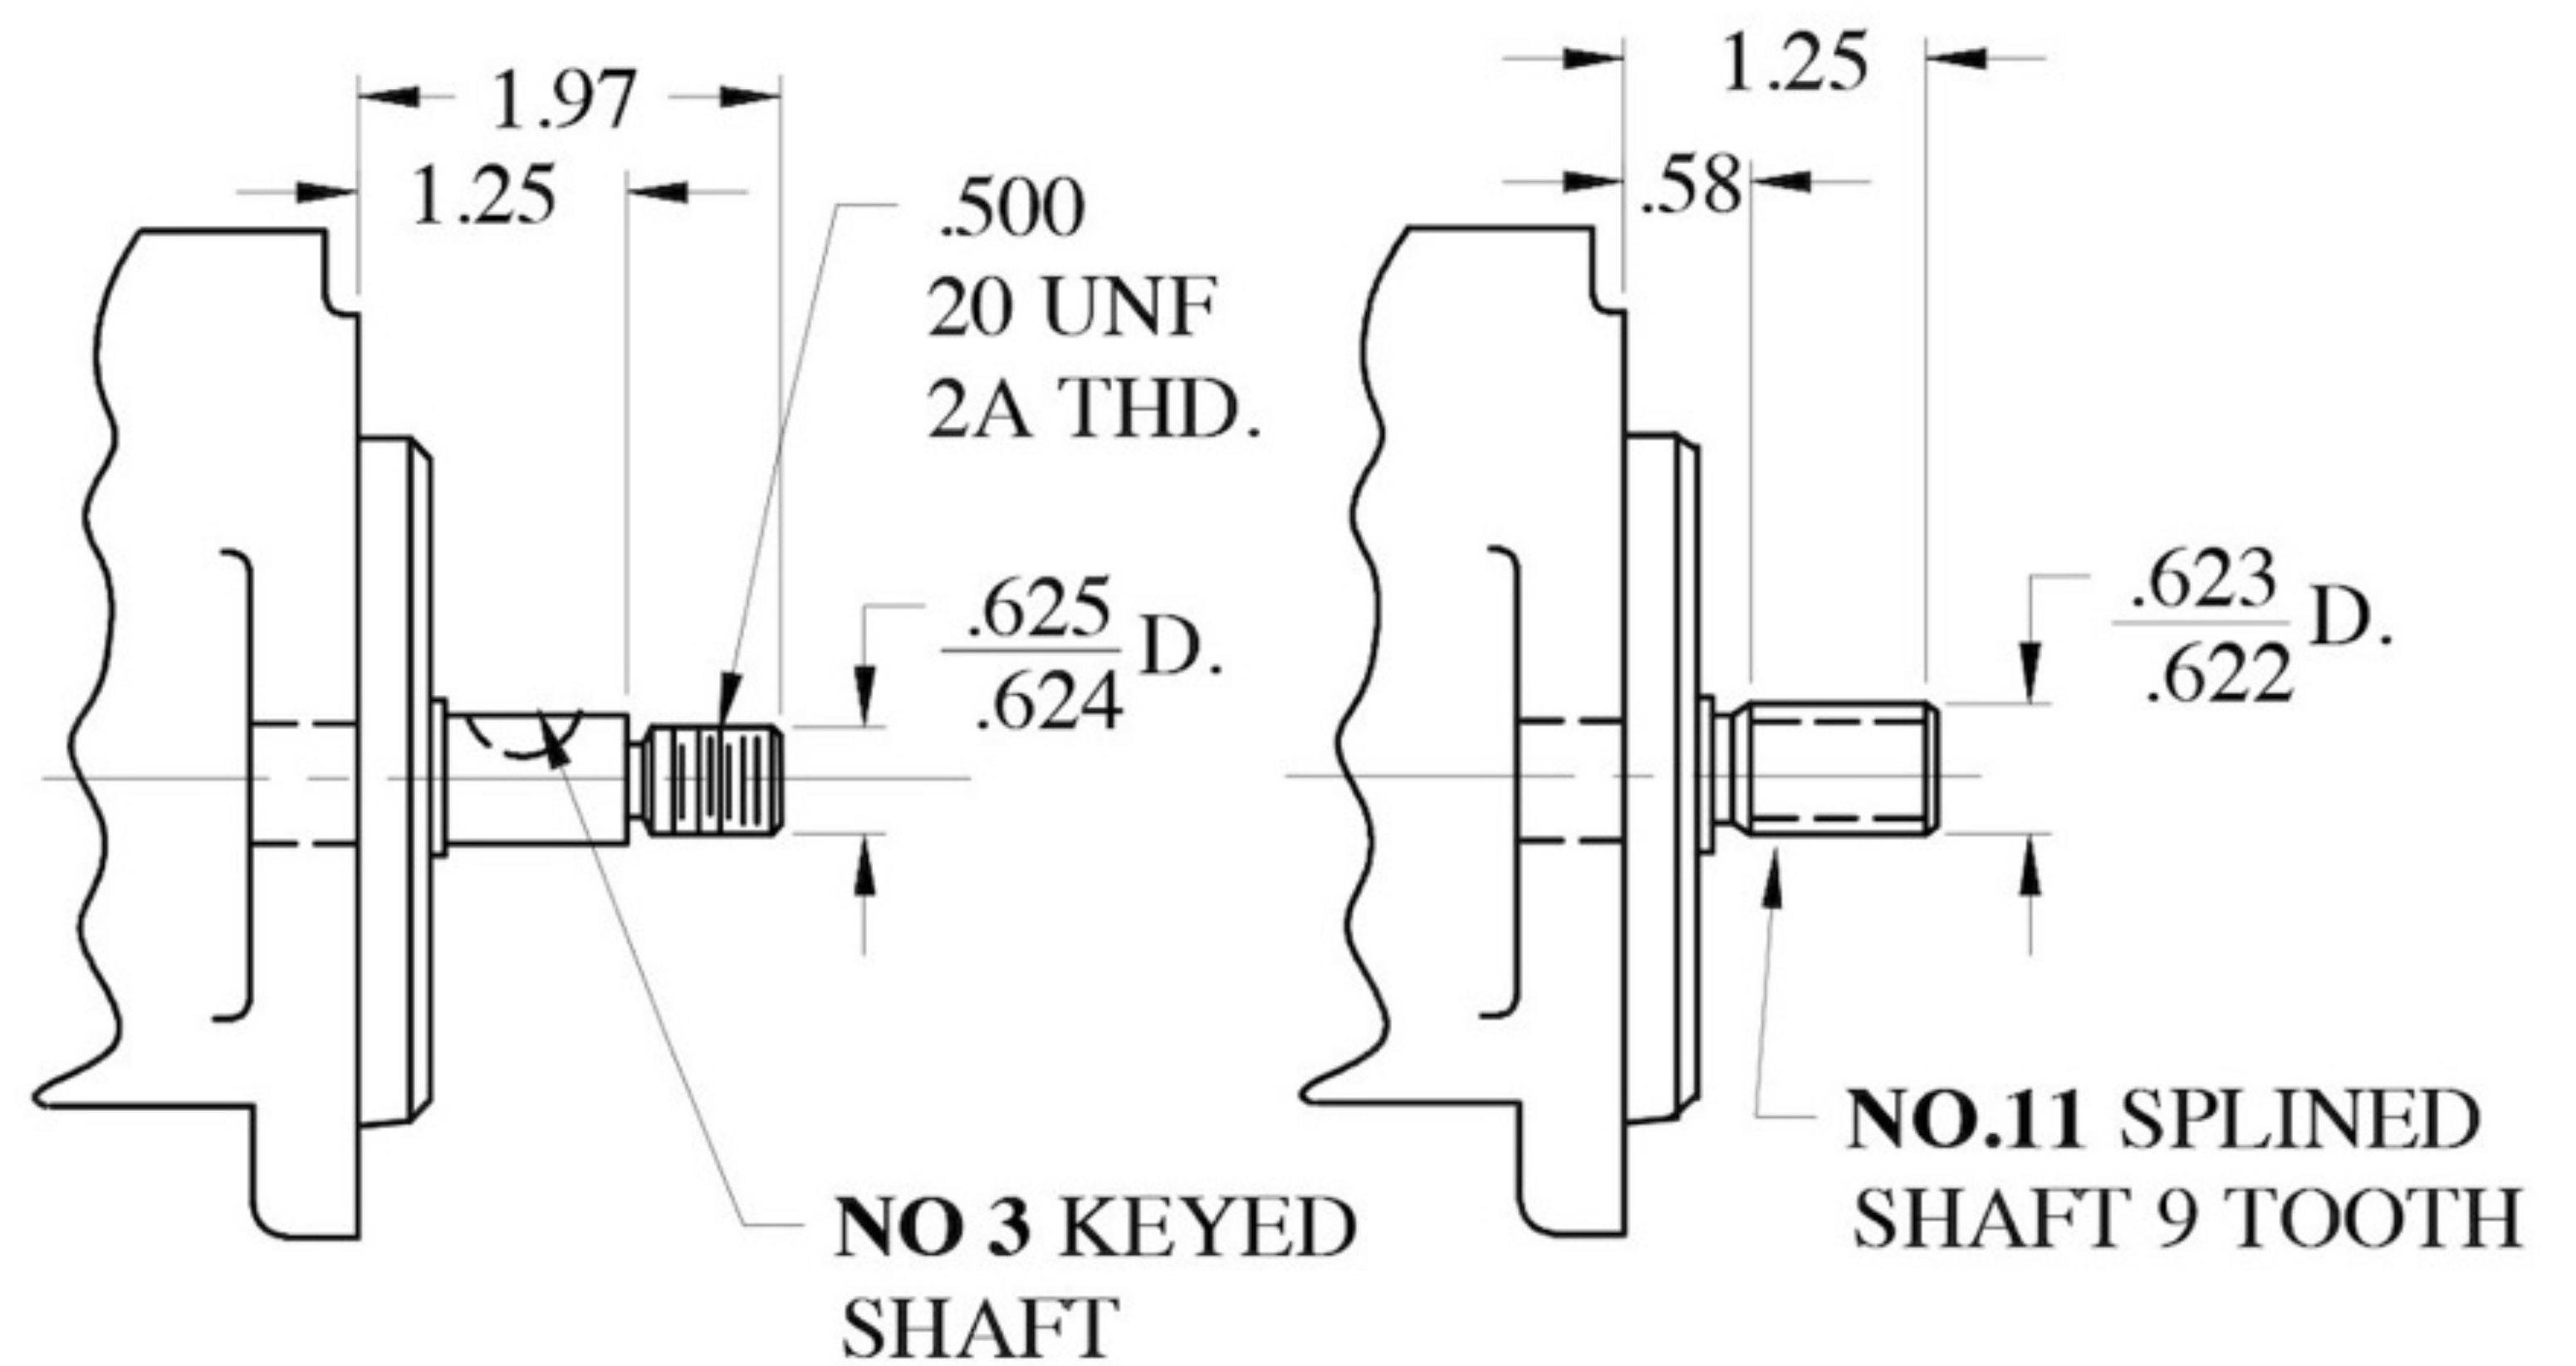

Foot Bracket available
Part # - IFB - A (see page J 1.1)

FLOW CONTROL/PRIORITY COVERS AVAILABLE.
(SEE Page A2.5)

V20/V210/V230 SINGLE VANE PUMP

INSTALLATION DIMENSION

DIMENSION (inches)

DELIVERY @ 1200 RPM & 100 PSI	DIMENSION		
	A	B	C
6	4.93	4.02	2.80
7	5.18	4.27	3.05
8	5.18	4.27	3.05
9	5.18	4.27	3.05
11	5.38	4.47	3.25
12	5.52	4.61	3.39
13	5.52	4.61	3.39

Weight 16 - 18 lbs







Pressure: 3/4" NPT

Suction: (V20) 1-1/4" NPT, (V210) 1" NPT

Optional BSPT/SAE Ports available.

V20 series

Optional Shafts

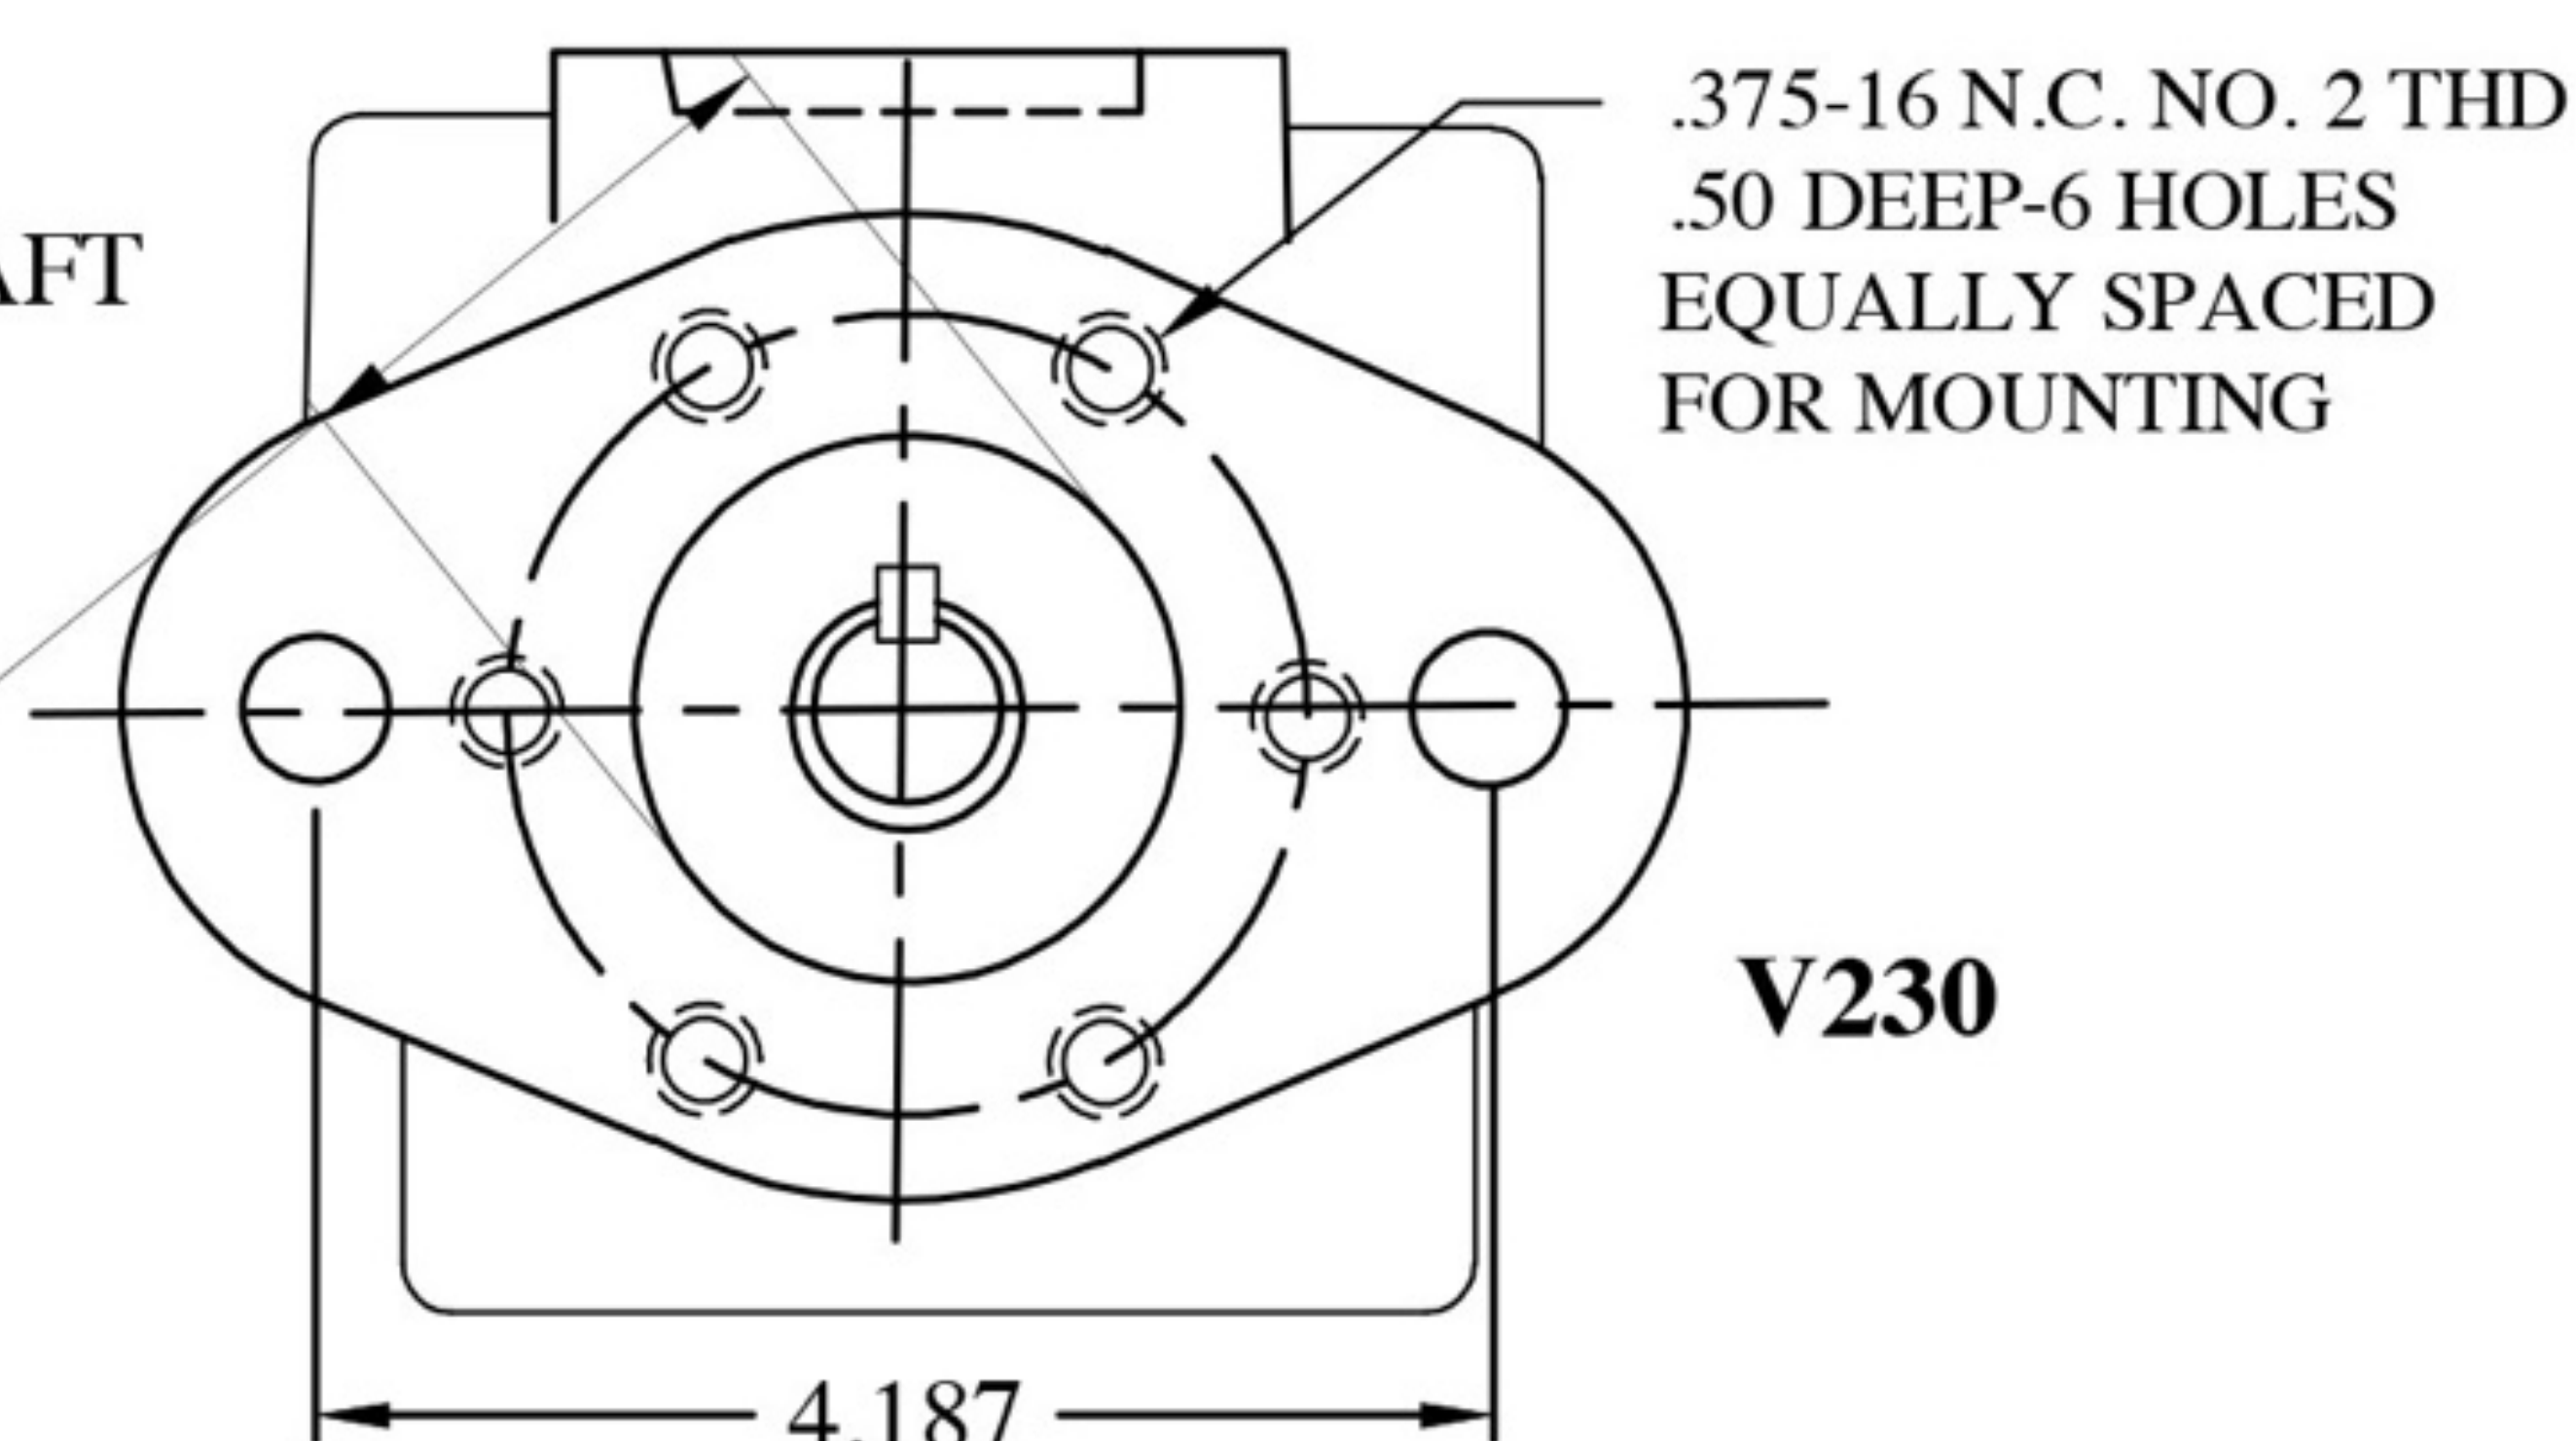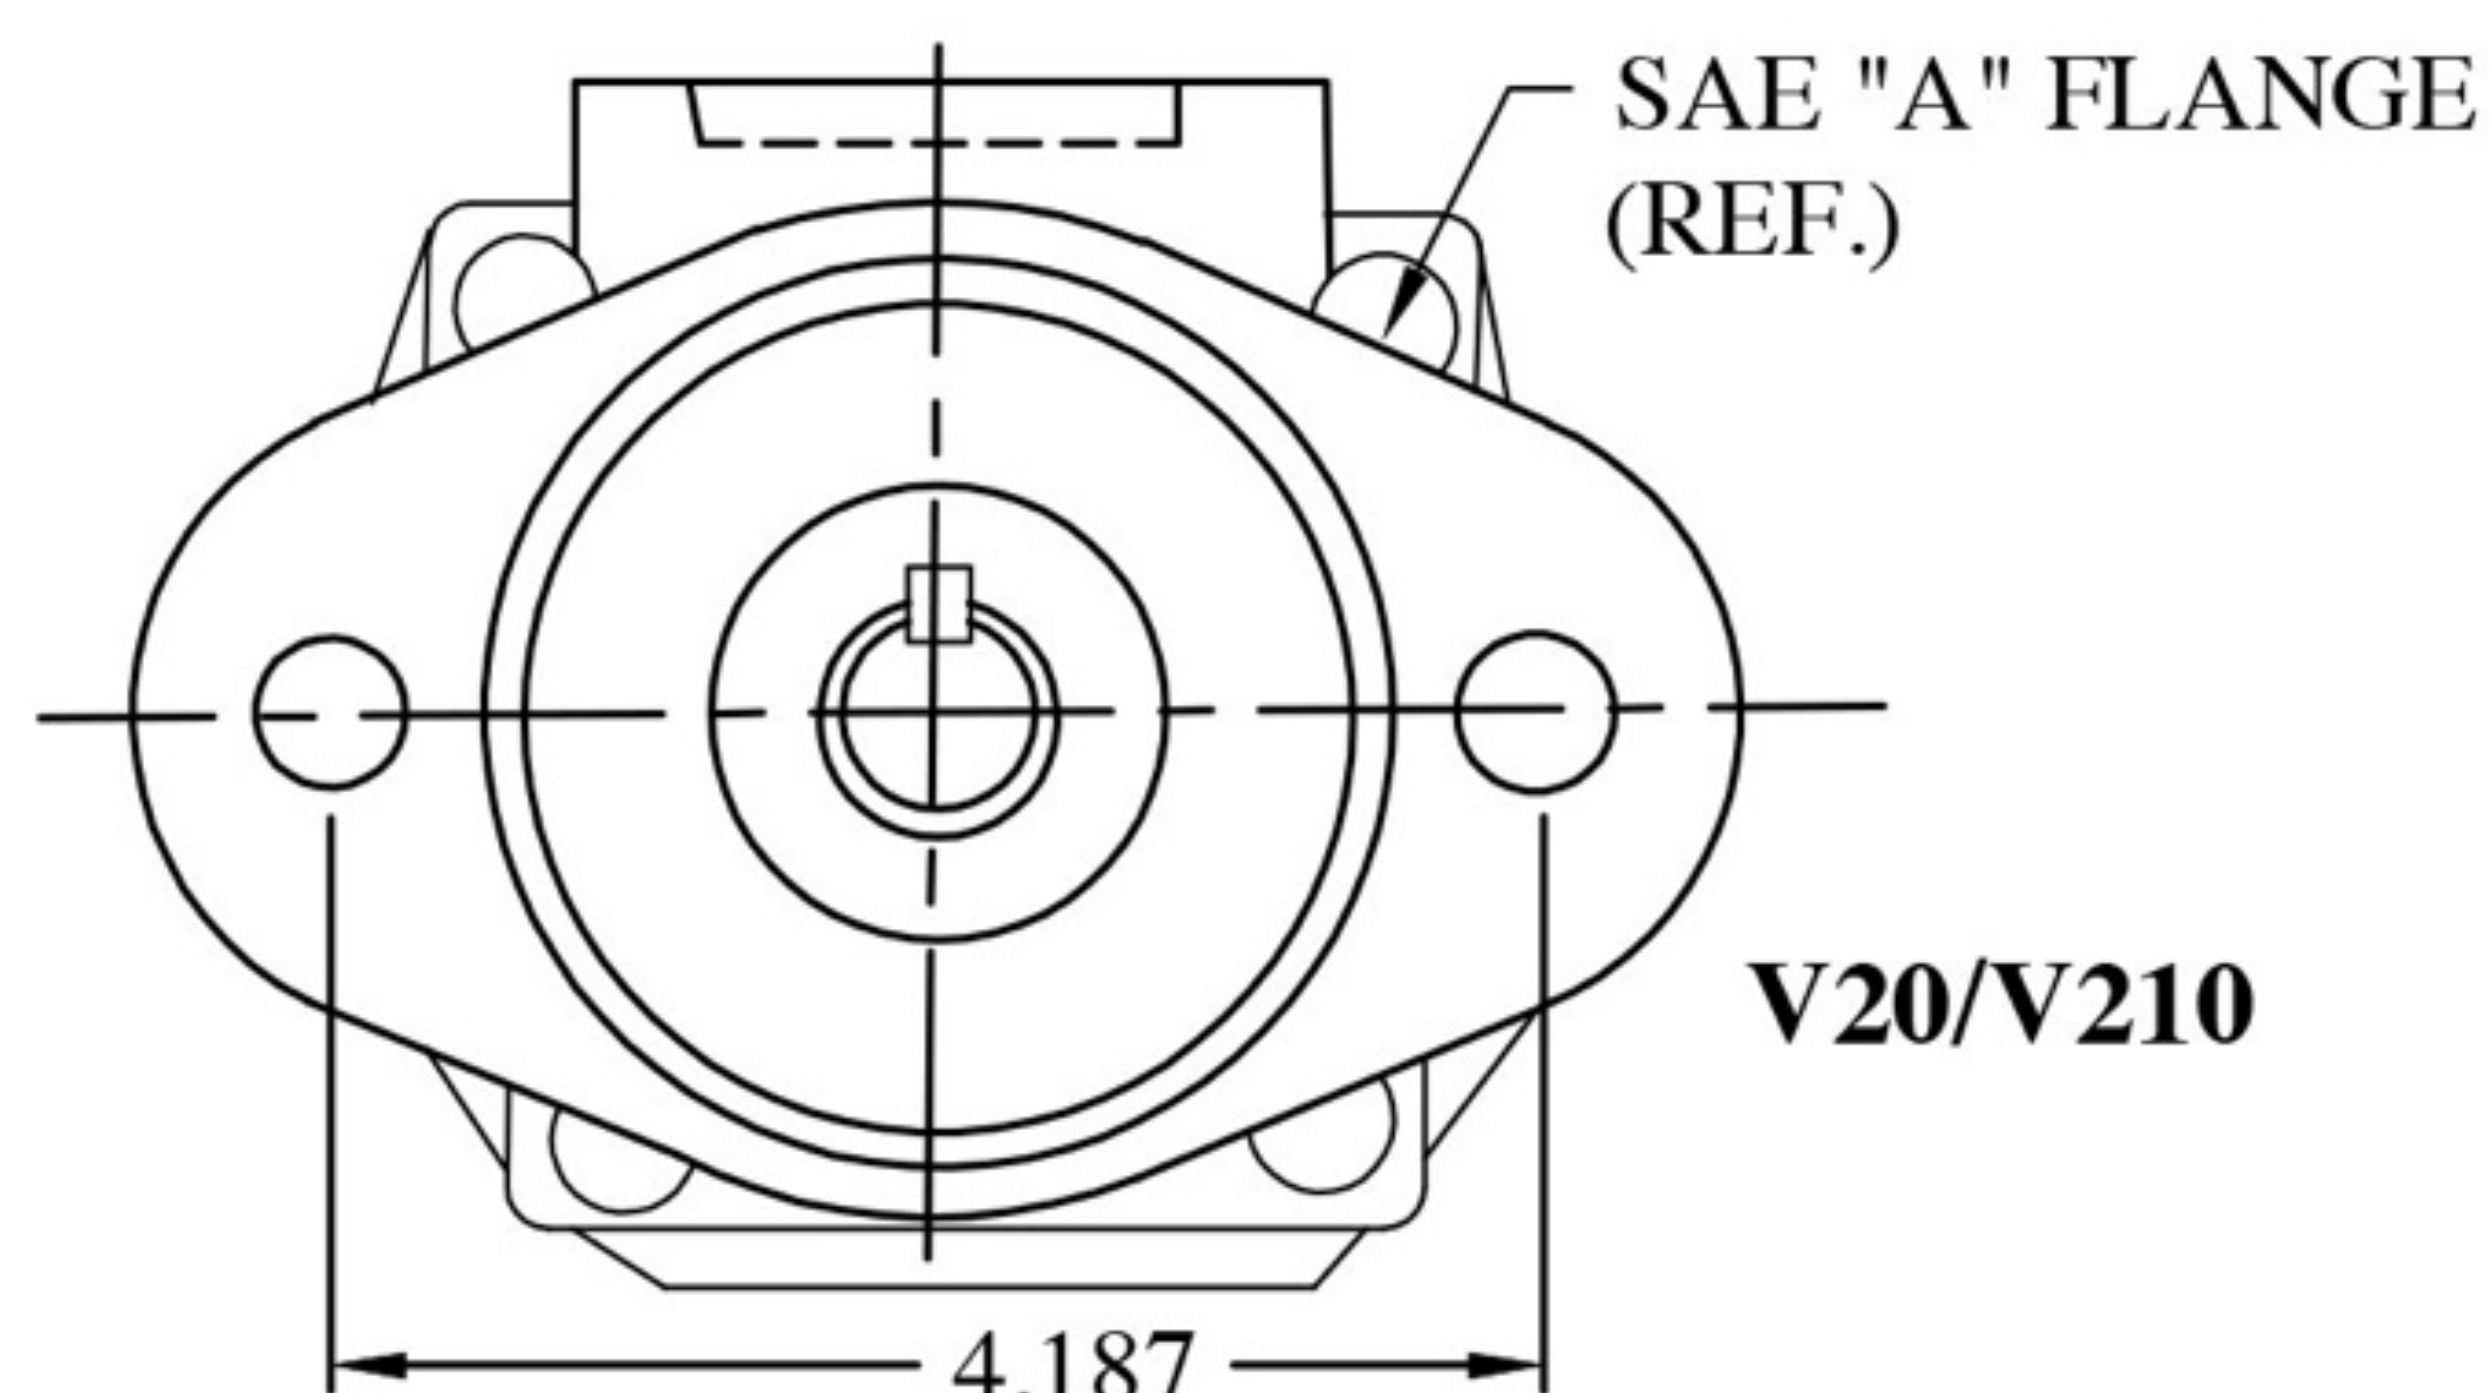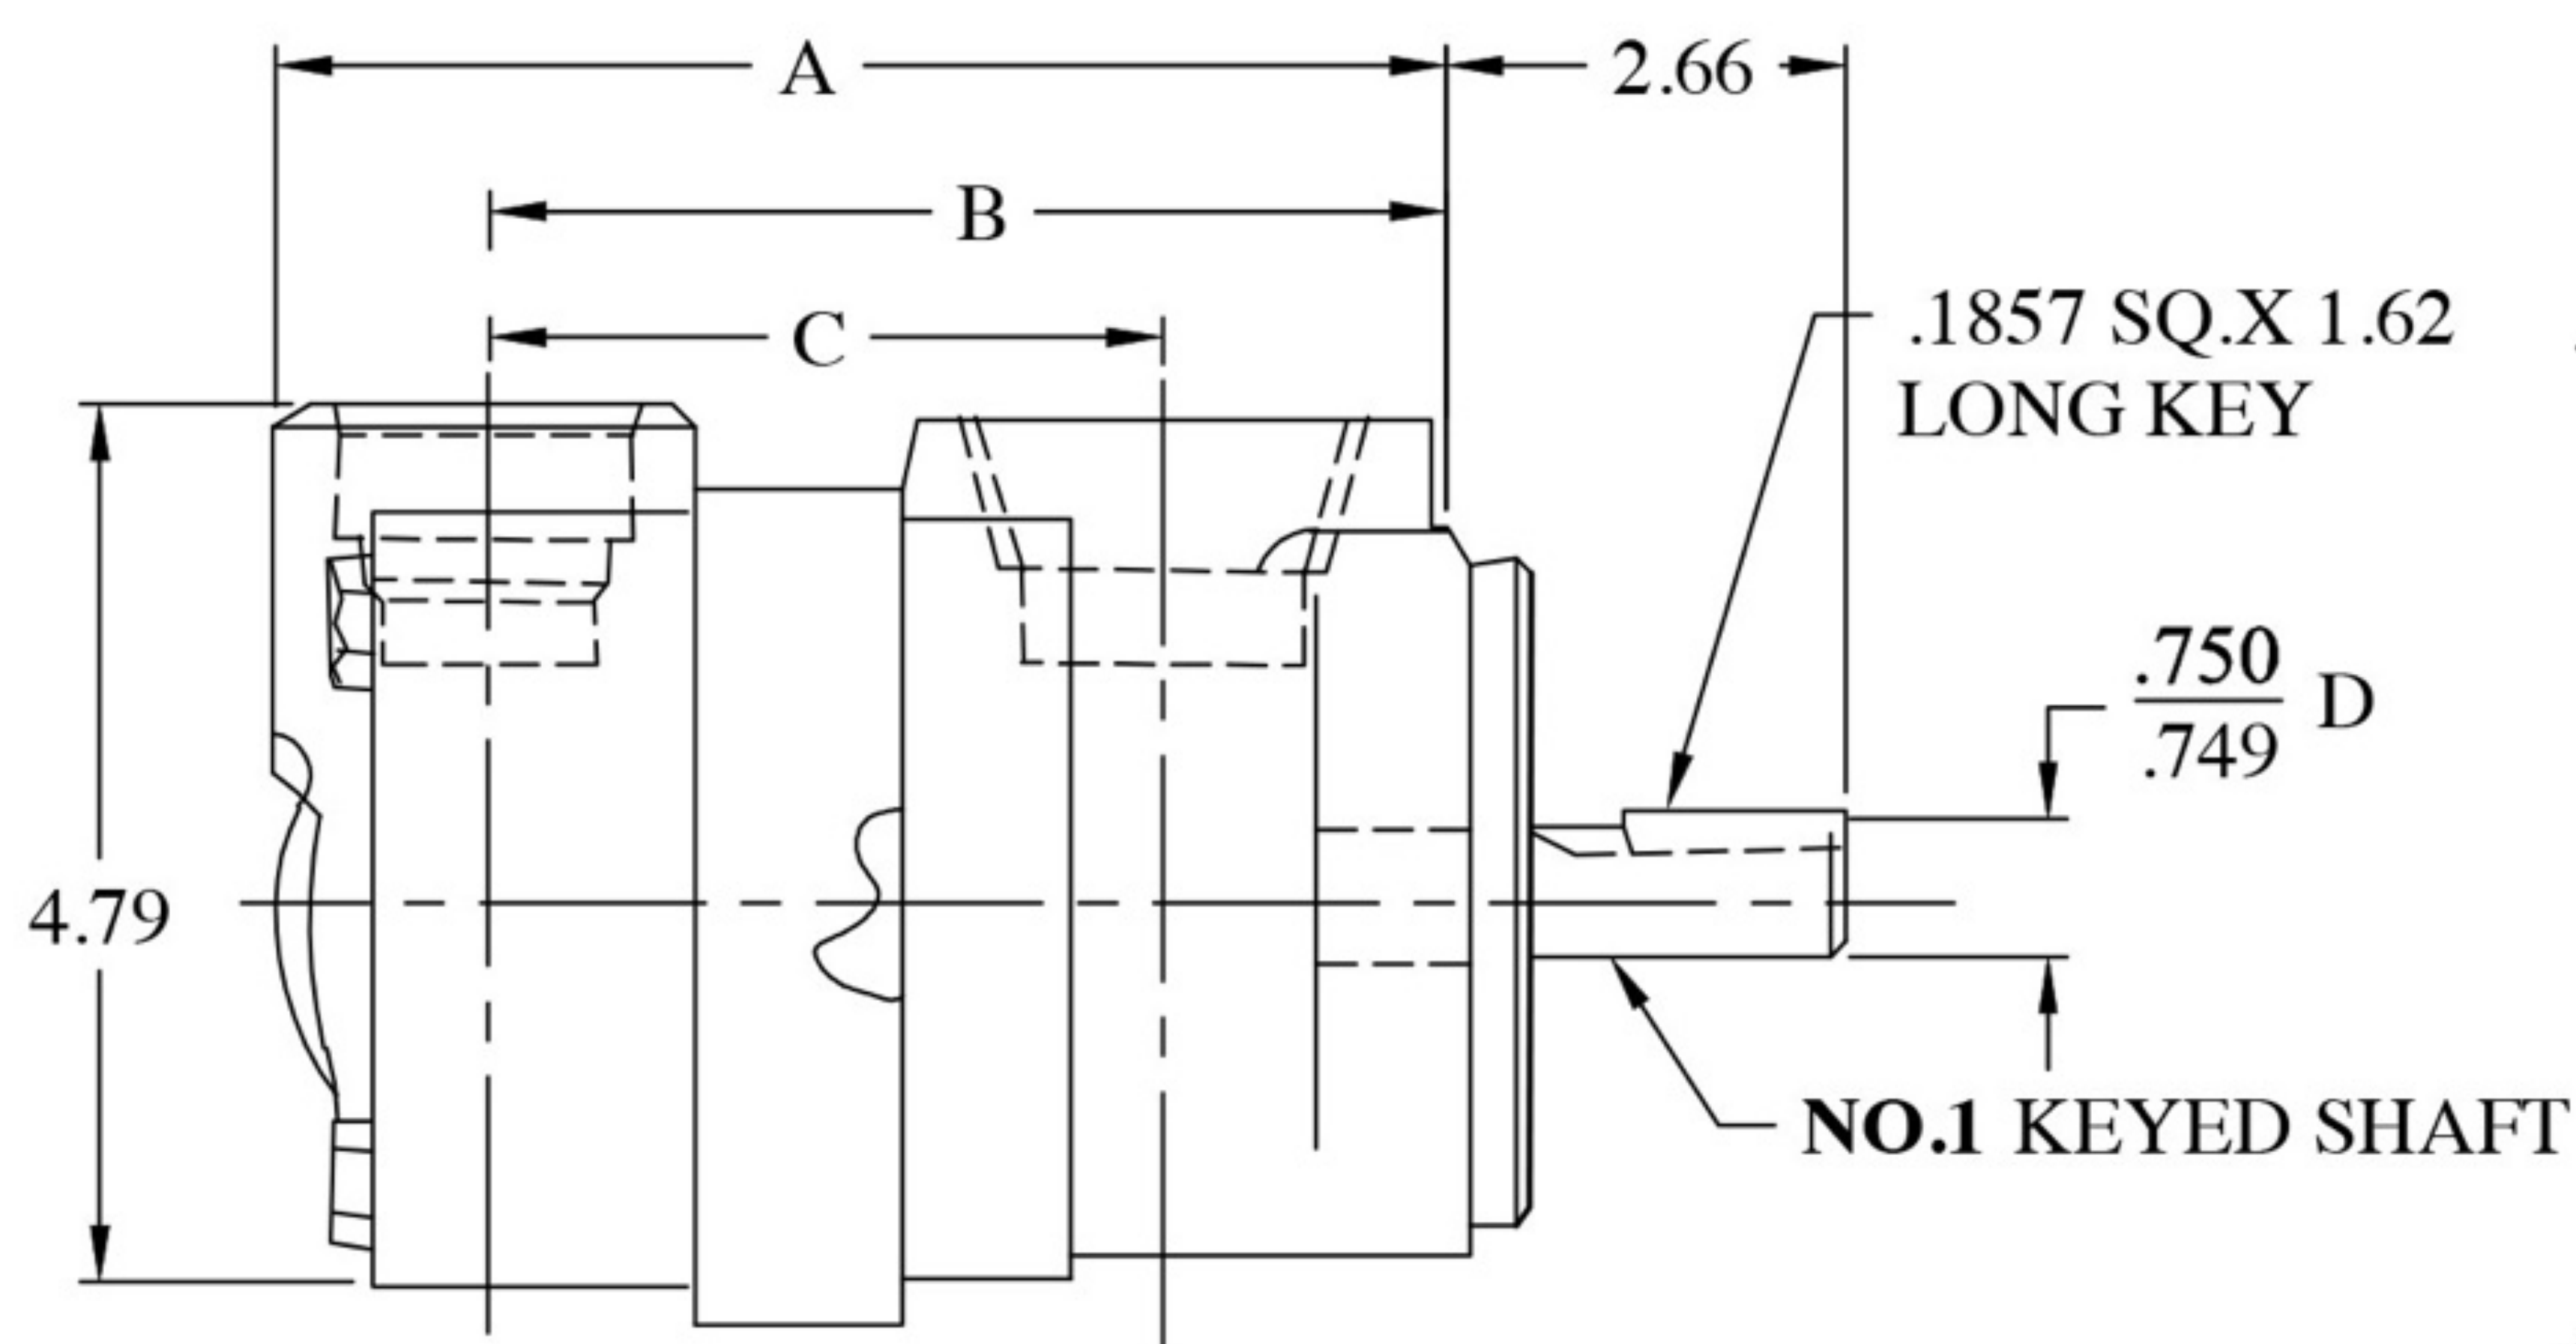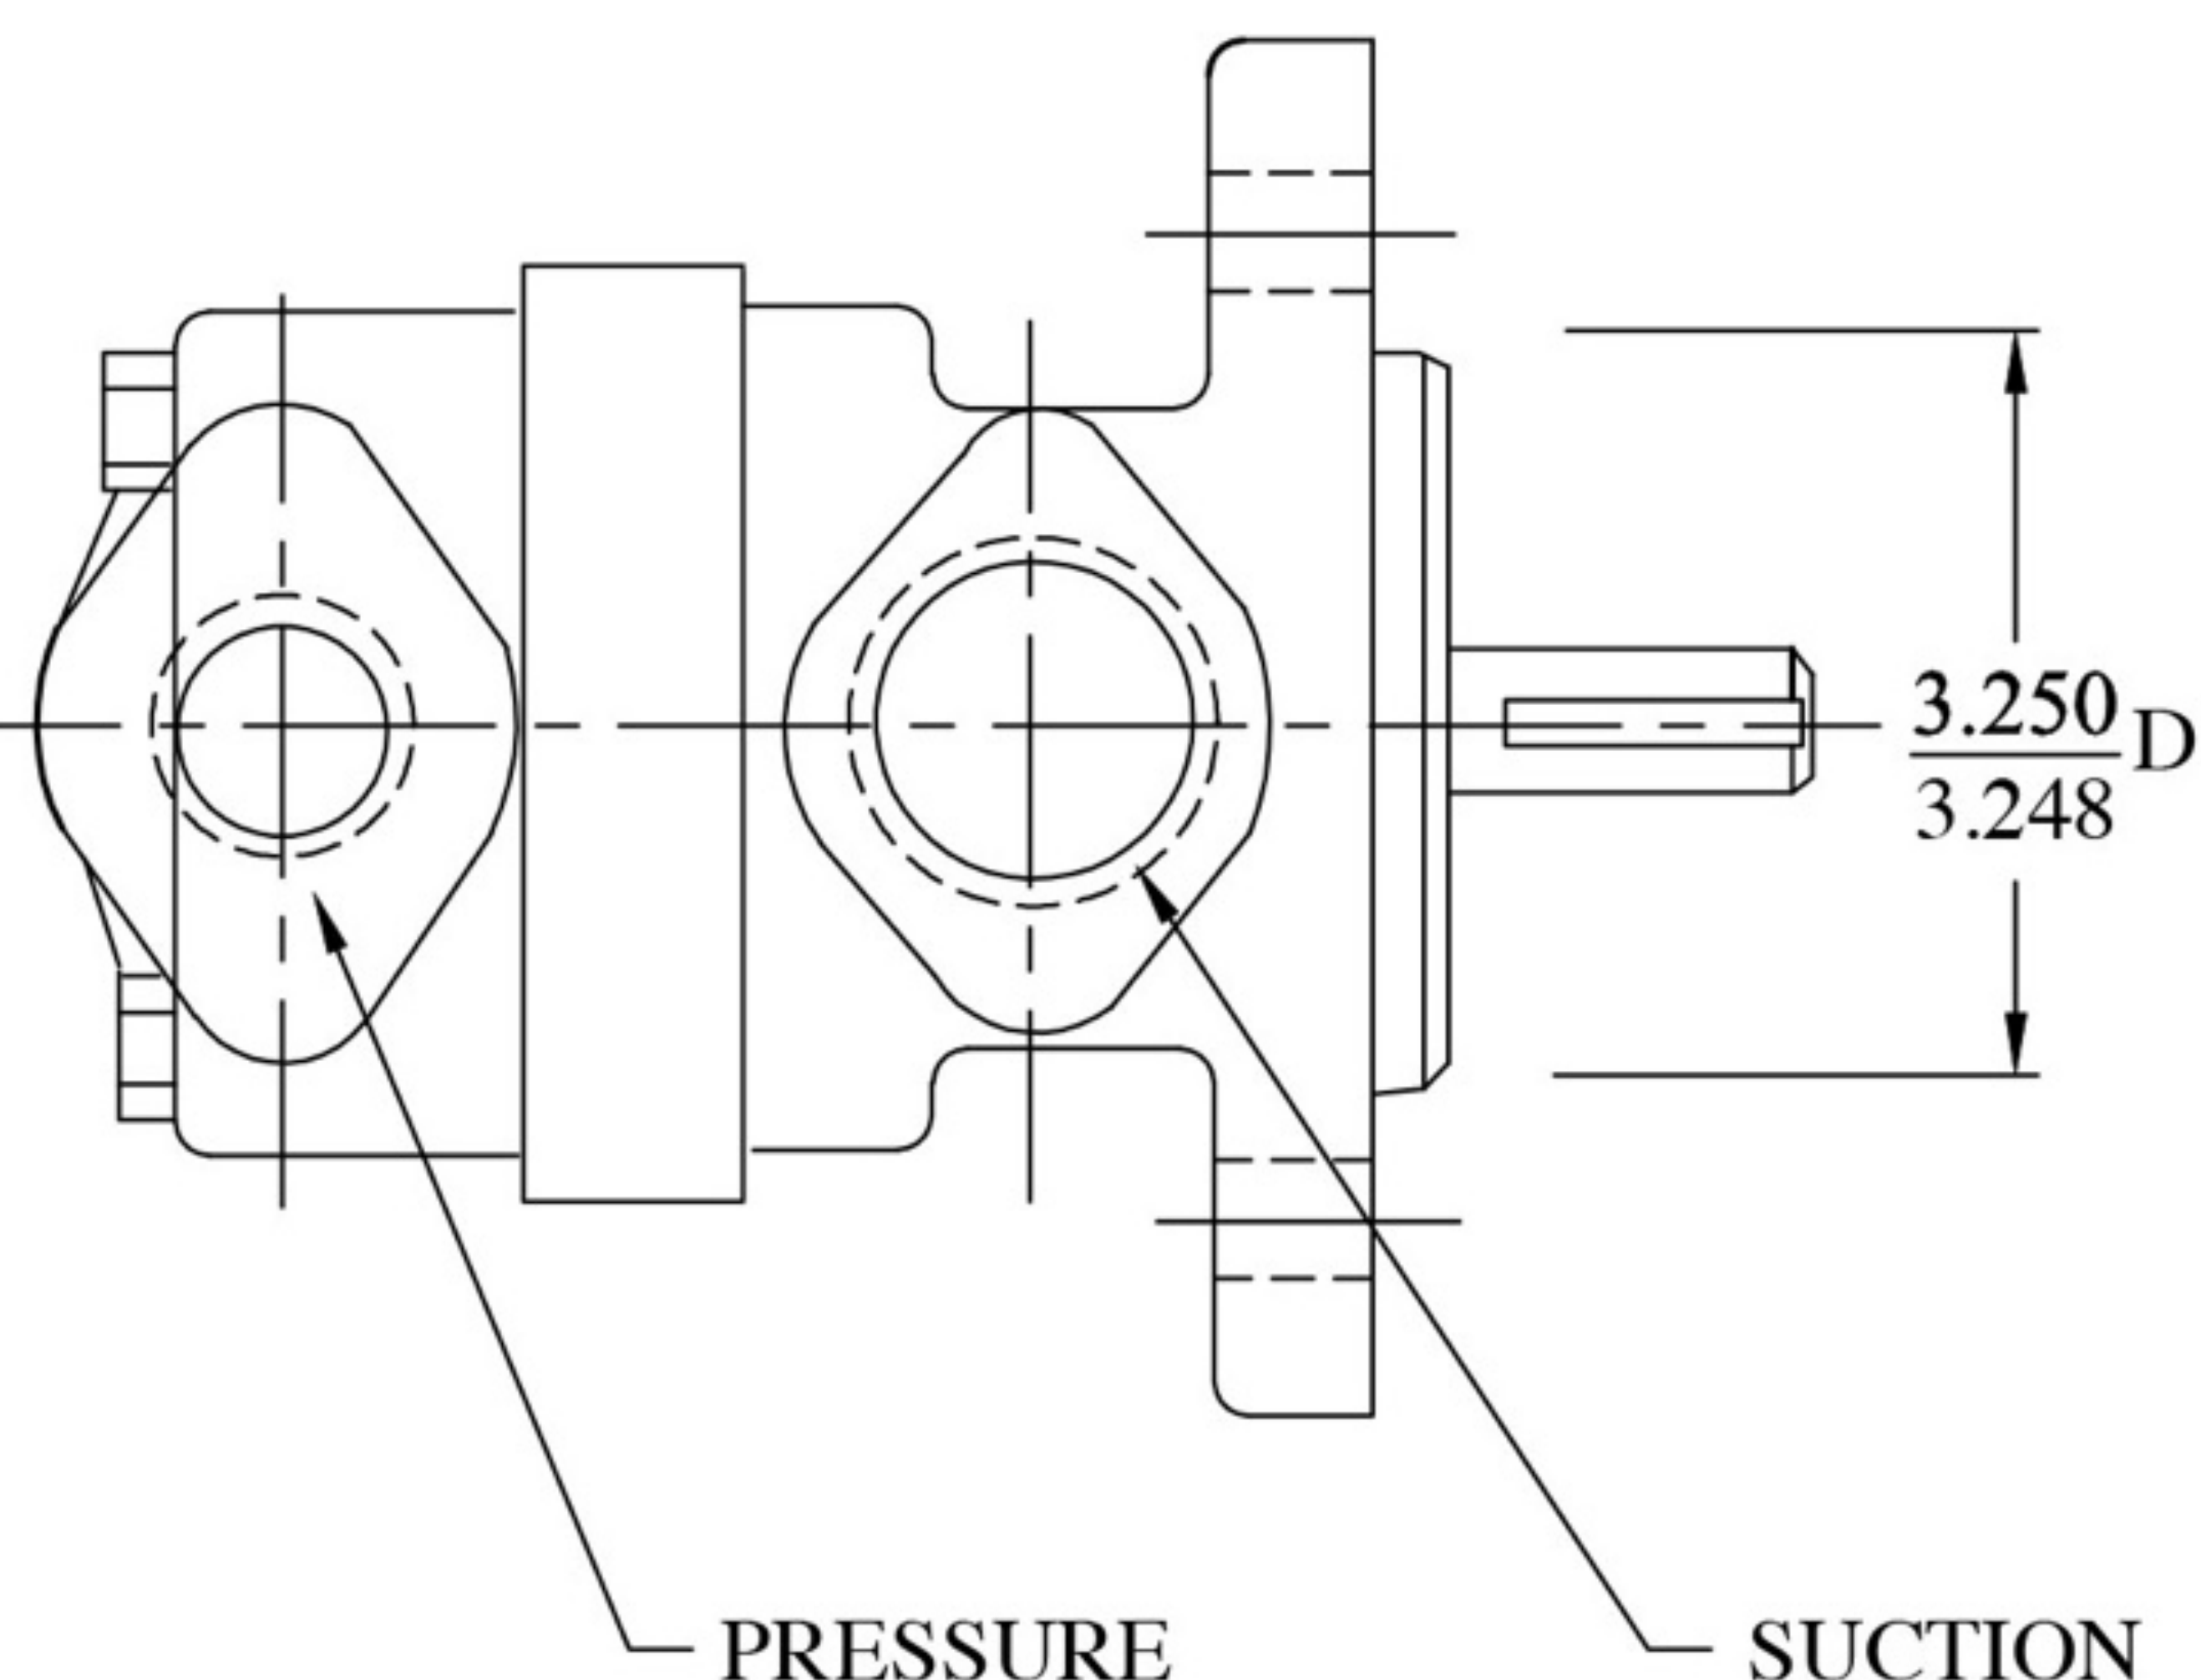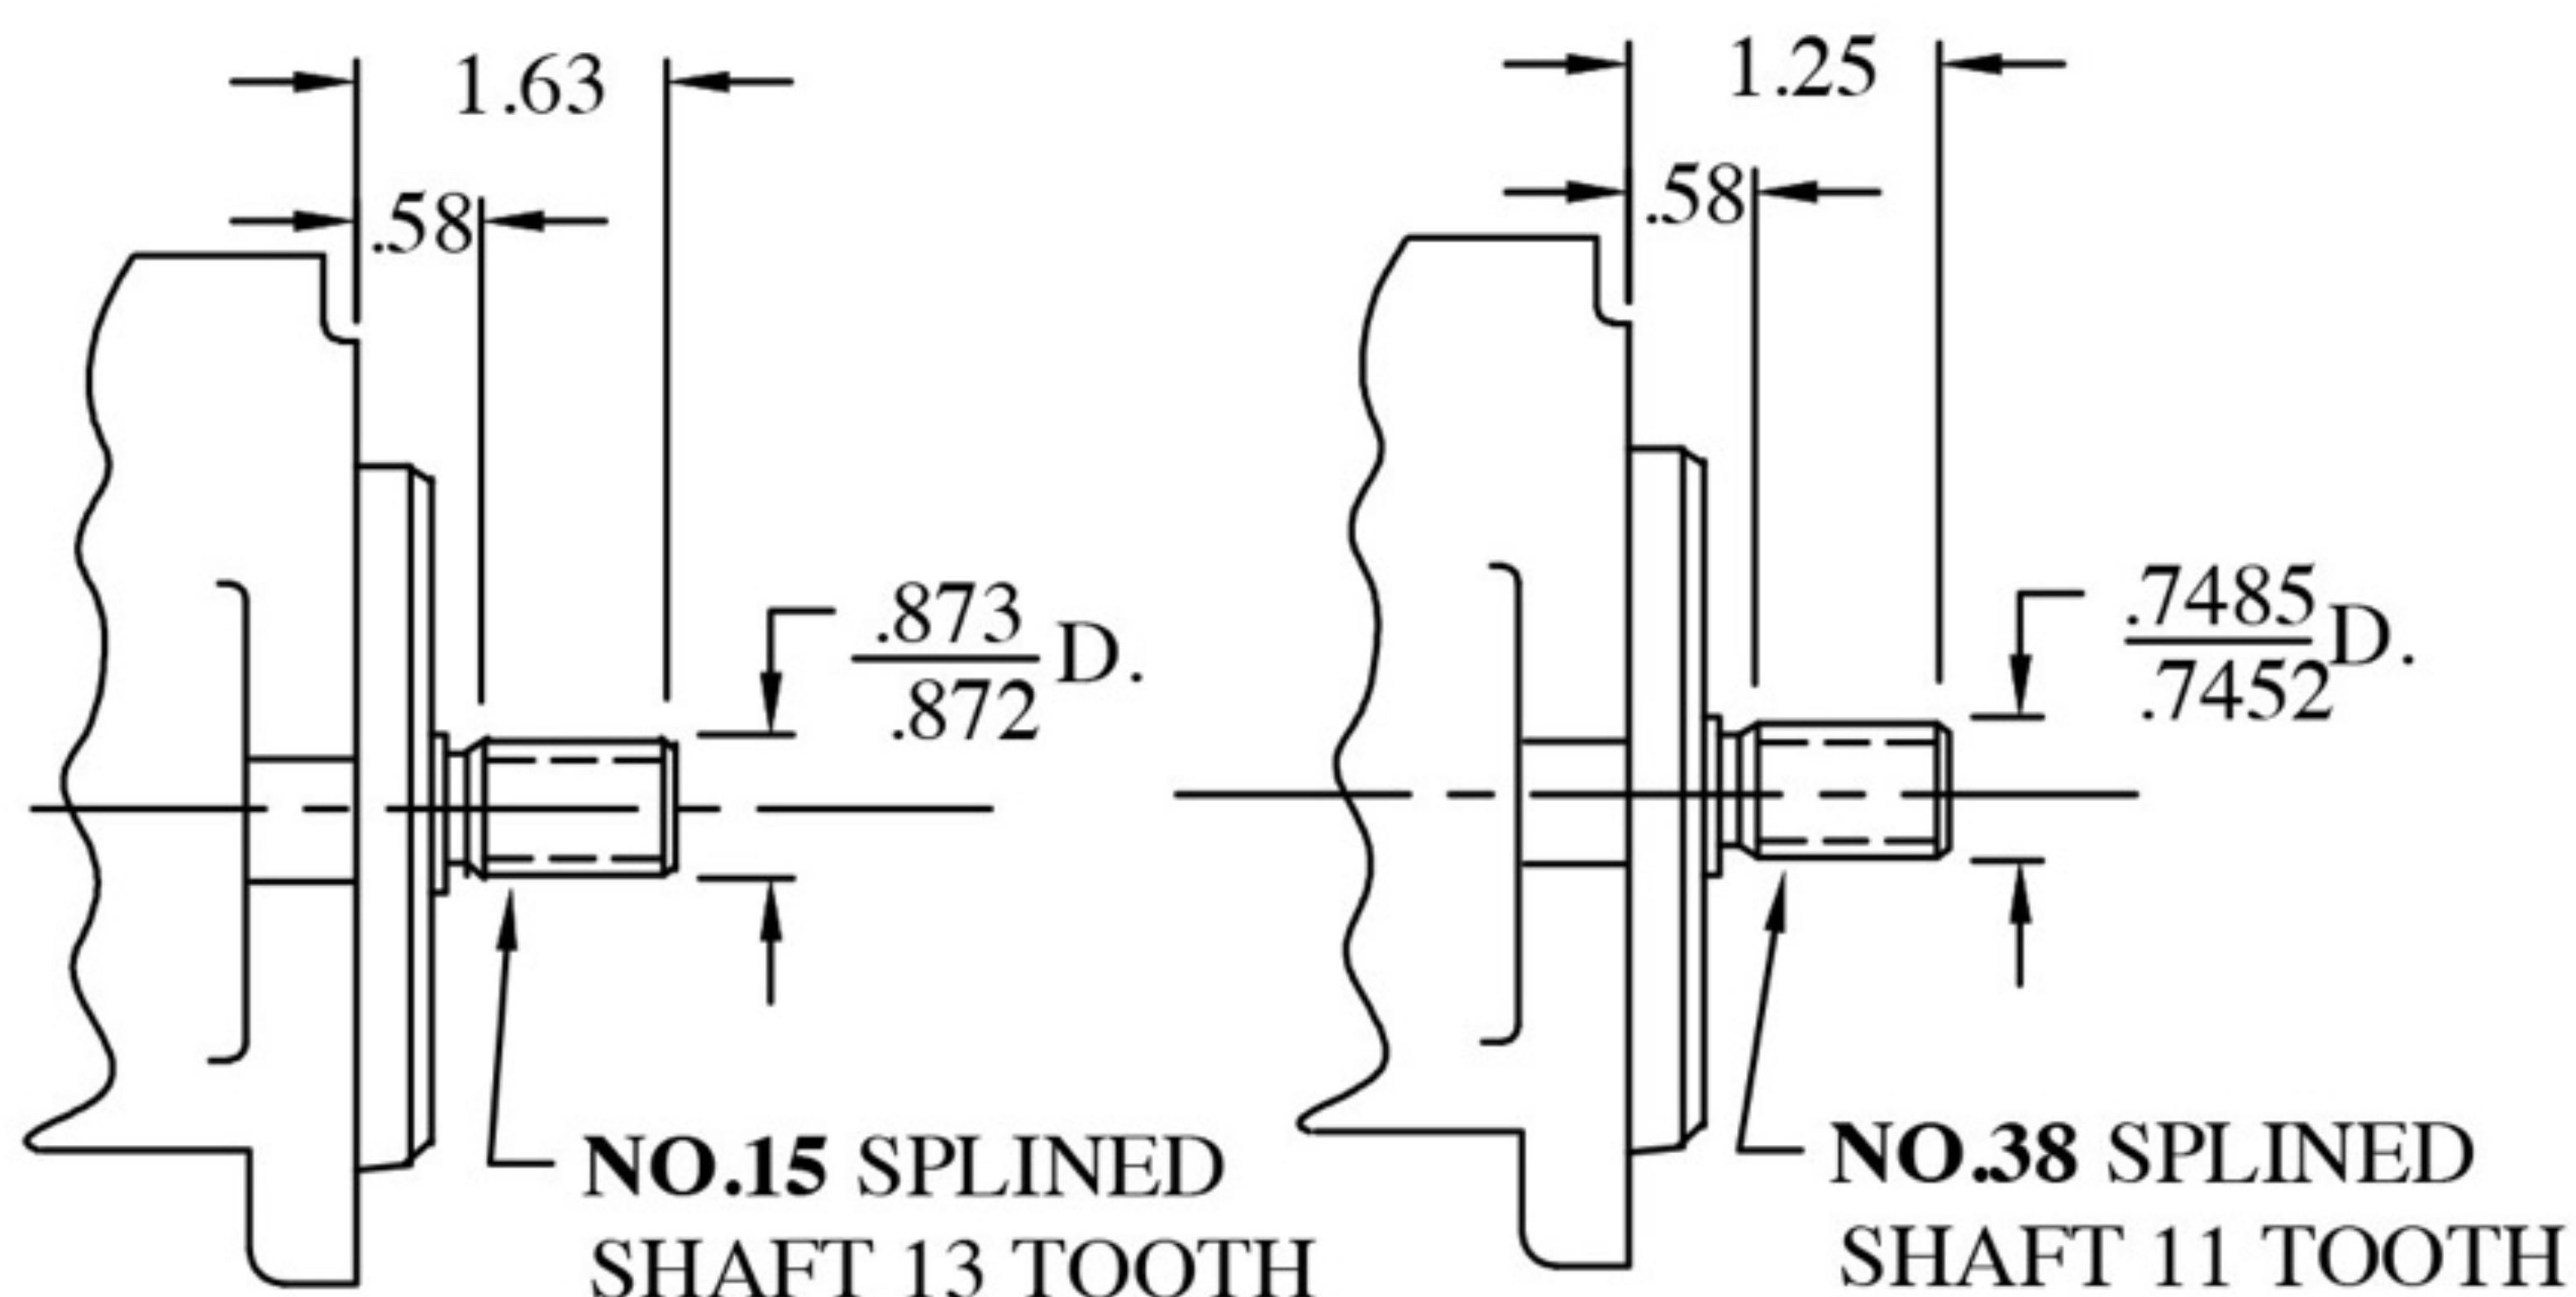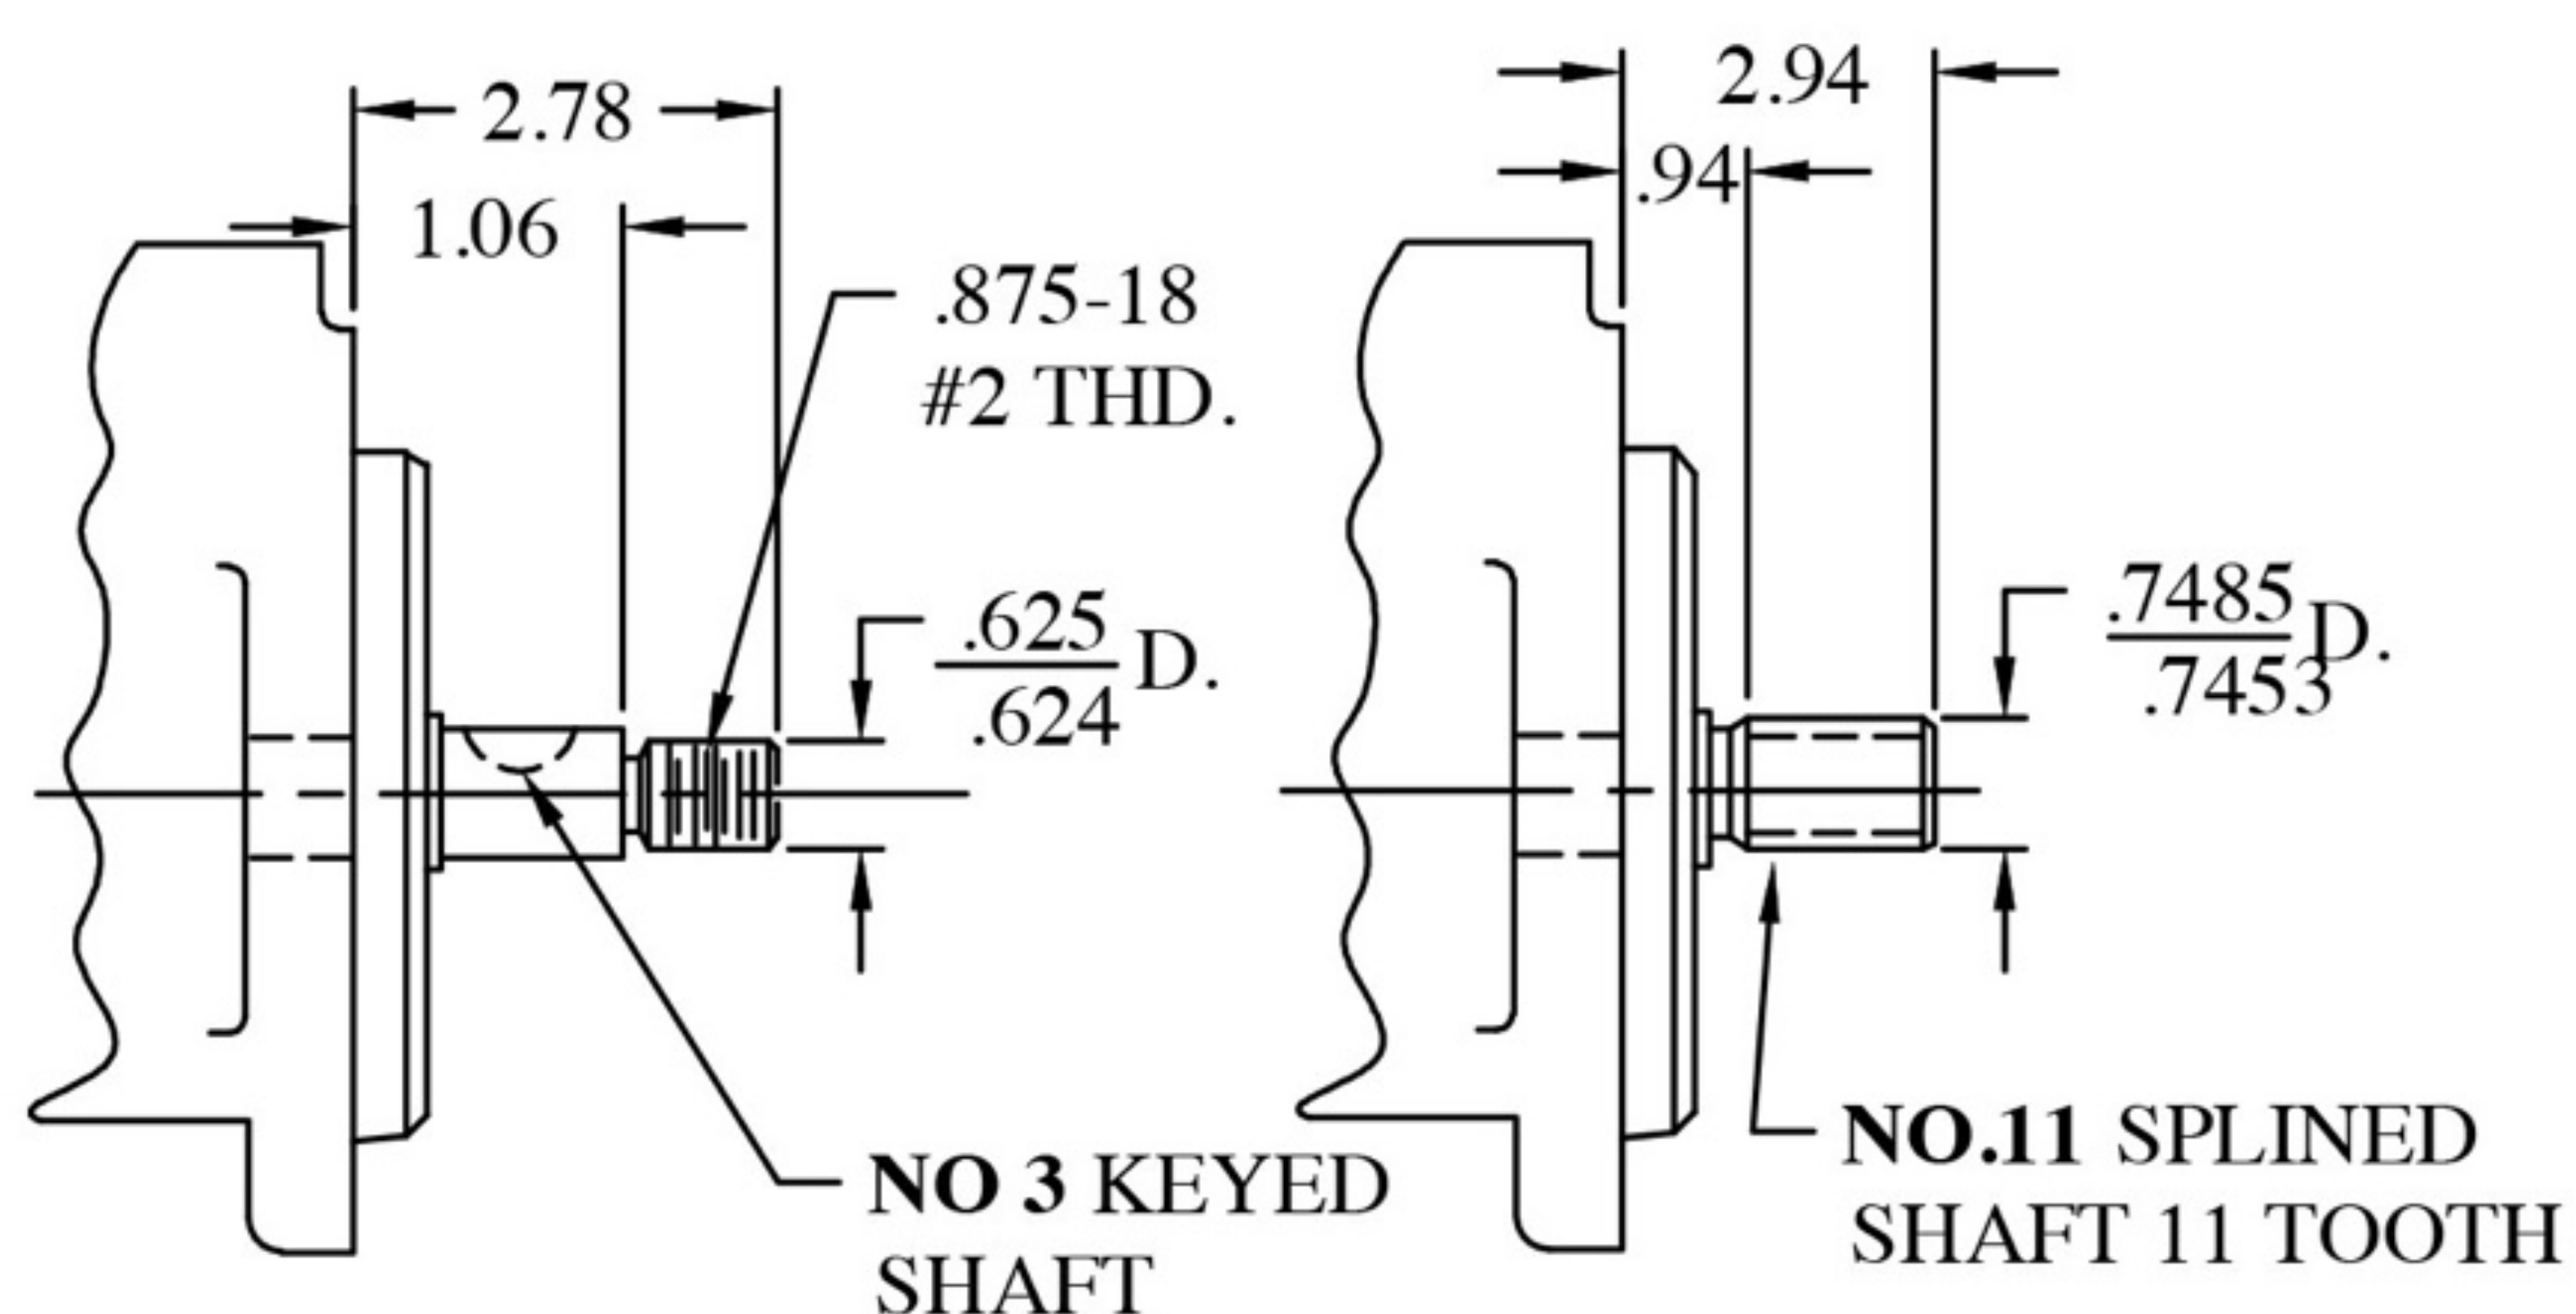


Foot Bracket available

Part # - IFB - A (see page J 1.1)

FLOW CONTROL/PRIORITY COVERS AVAILABLE.
(SEE Page A2.5)

V10/V20/V210/V230 VANE PUMP

SERVICE PARTS INFORMATION

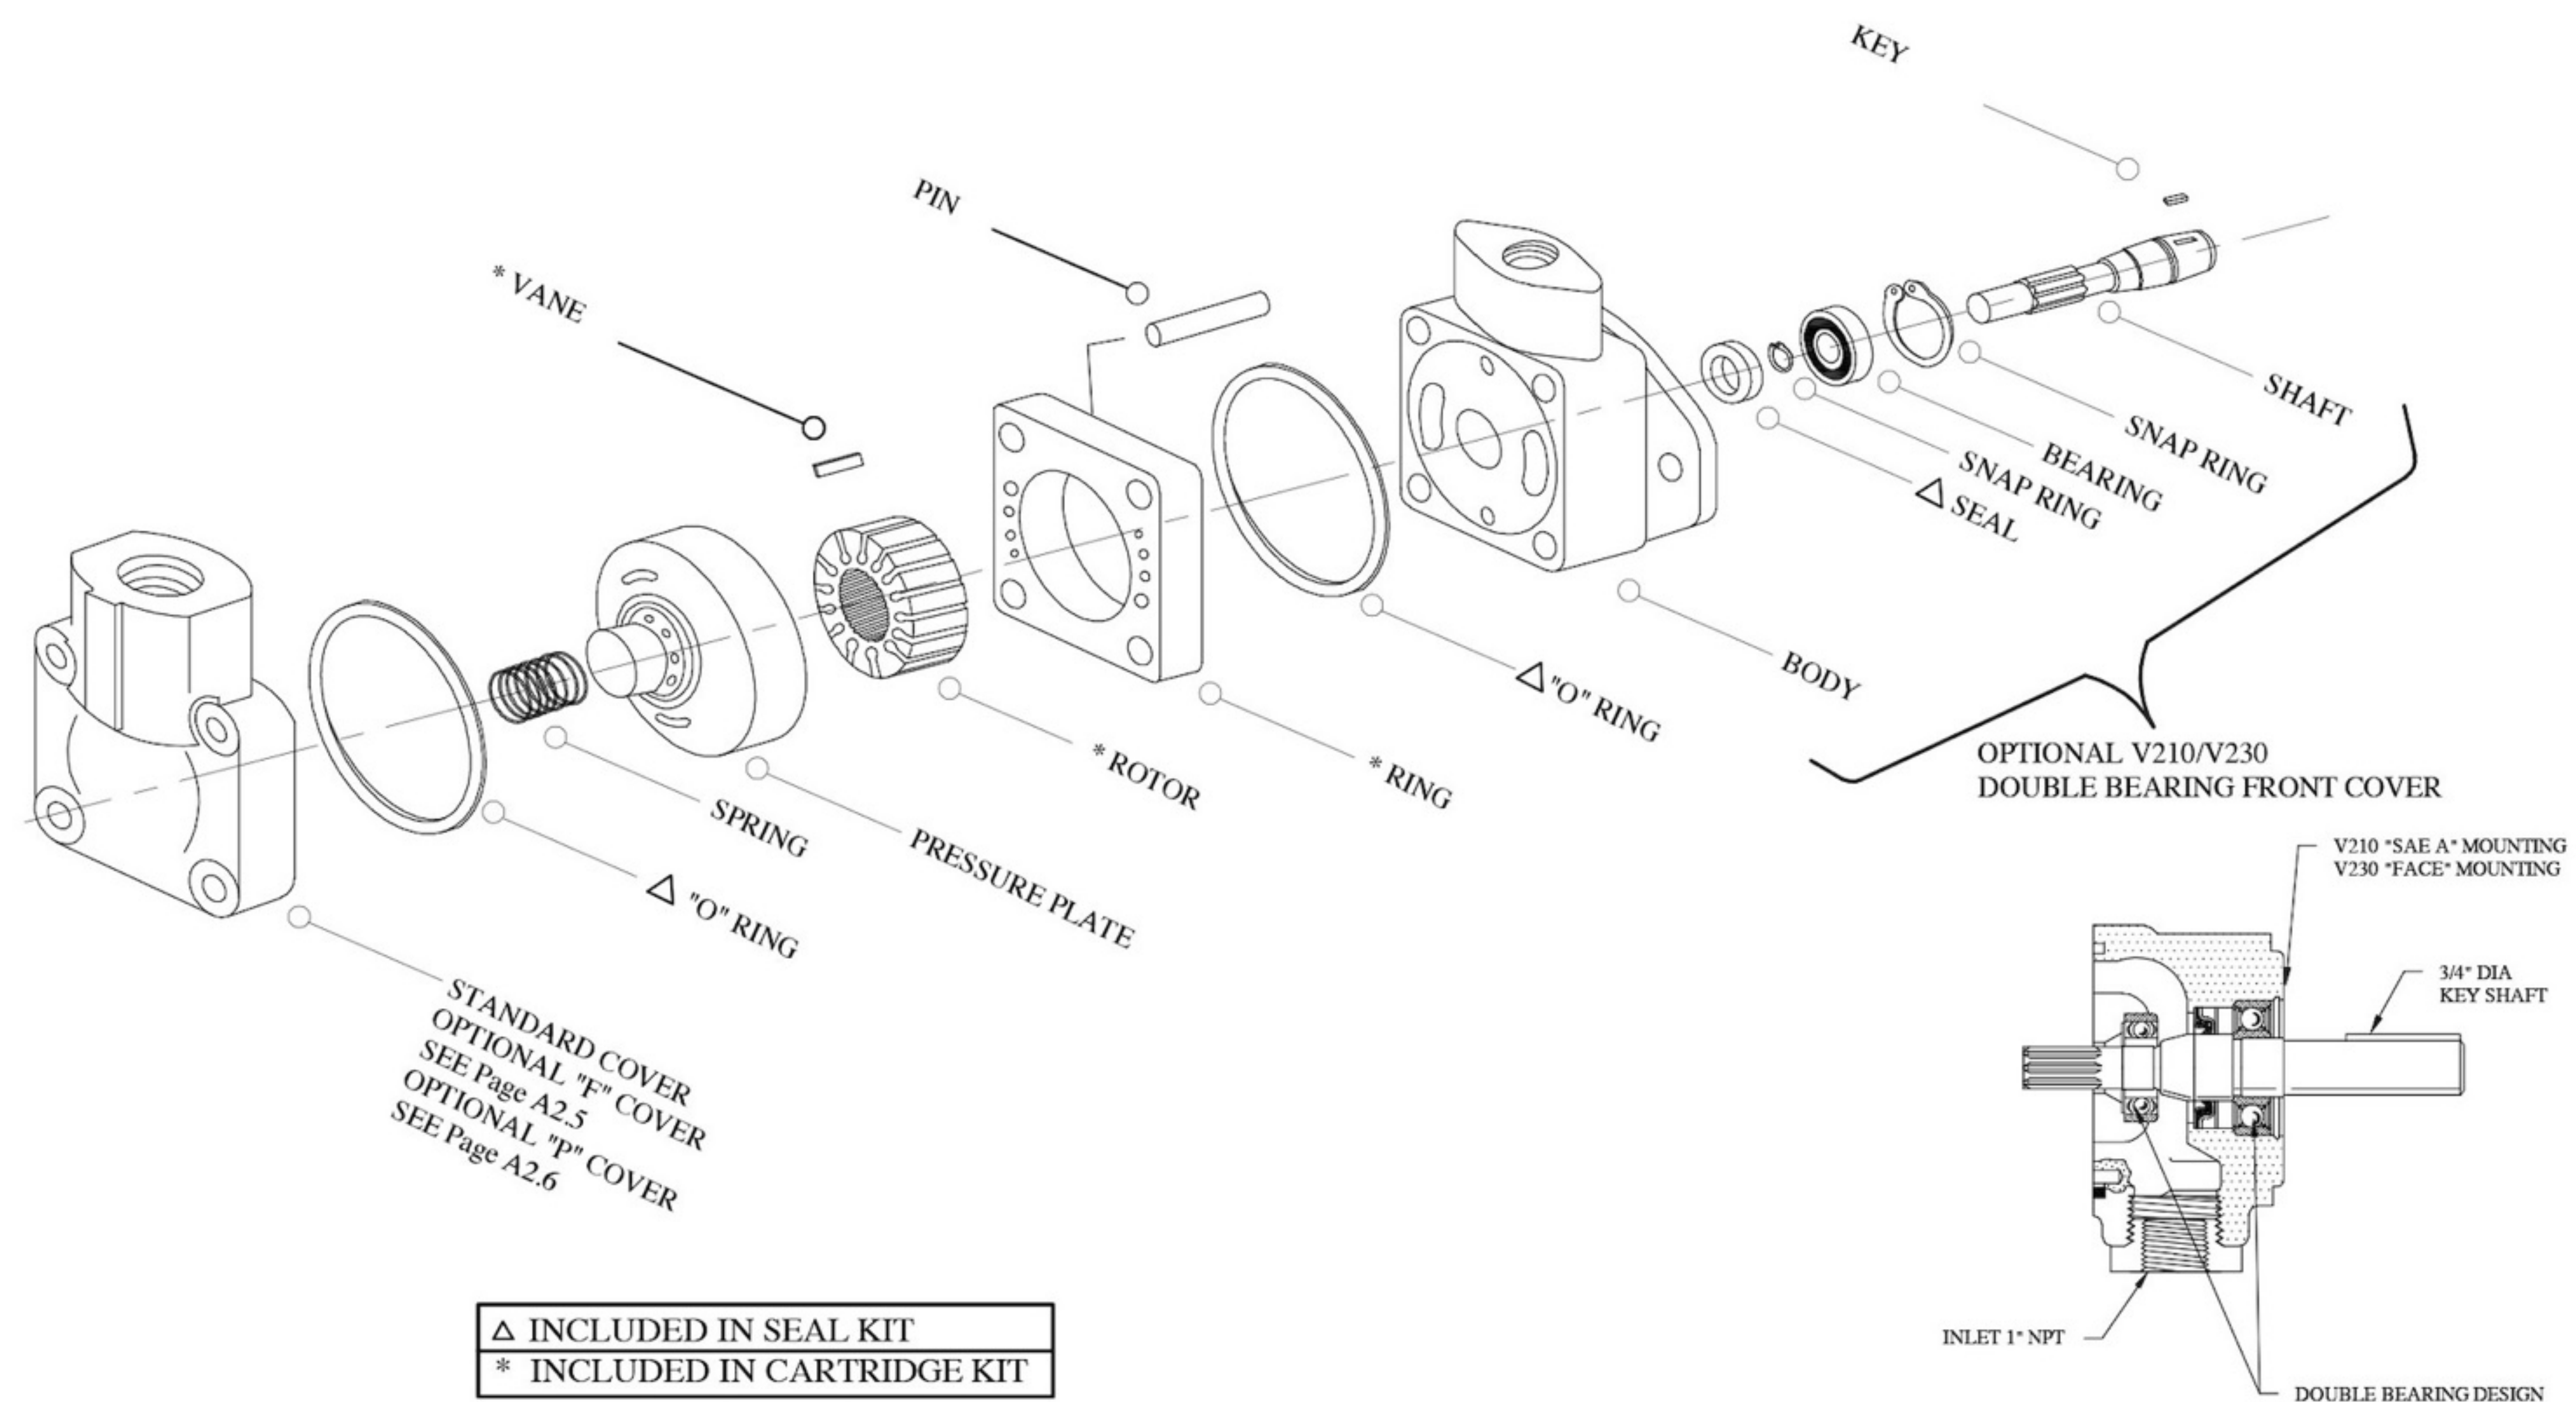

PUMP SE	C. KIT	ROTOR	VANES	RING	SEAL	SEAL KIT	BEARING	PR. PL.	SPRING	BODY	COVER	SHAFT NO.
V10...1	923471N	317681N	923499N	317674N	263585N	923548N	148423N	374343N	345262N	352699N	372863N	SHAFT 1 NO.374338N
...2	923470N			317675N	VITON	VITON						SHAFT 3 NO.374340N
...3	923496N			317676N	388205N	919772N						SHAFT 4 NO.378959N
...4	923469N	351247N	923500N	317677N								SHAFT 6 NO.382250N
...5	923468N			317678N								SHAFT 11 NO.374339N
...6	923497N	357268N	923501N	355641N								SHAFT 12 NO.375480N
...7	923498N			331813N								SHAFT 38 NO.387481N
V20...5	924076N	358328N	923485N	388284N	229235N	922733N	098574N	359287N	28422N	V20	313657N	V20
(V210)...6	923480N			328150N	VITON	VITON				280689N		SHAFT 1 NO.280372N
(V230)...7	923481N	358330N	923493N	328152N	279499N	919805N				V210		SHAFT 3 NO.280504N
...8	923483N			331791N						280210N		SHAFT 6 NO.297330N
...9	923484N			331789N								SHAFT 11 NO.280515N
...10	923620N	358332N	923478N	374309N						V230		SHAFT 15 NO.294922N
...11	923482N			328156N						280230N		SHAFT 38 NO.328096N
...12	923486N	358334N	923479N	331806N								V210/V230
...13	923487N			331807N								SHAFT 1 NO.280210N

- All cartridge assemblies are factory tested prior to shipping -

Rear Cover Bolt Torque

V10	40 FT/LBS
V20	80 FT/LBS

Changing Cartridge Rotation


Assemble the ring using the locating pins for alignment making sure the arrow on the perimeter point's in the proper direction of rotation. Install the rotor on shaft and insert vanes in the rotor slots. Be certain the radius edges of the vanes are towards the cam ring.

FLOW CONTROL/PRIORITY COVER AVAILABLE


FLOW CONTROL/RELIEF COVER

V10/V20F

V10F
PART NUMBER
379543N

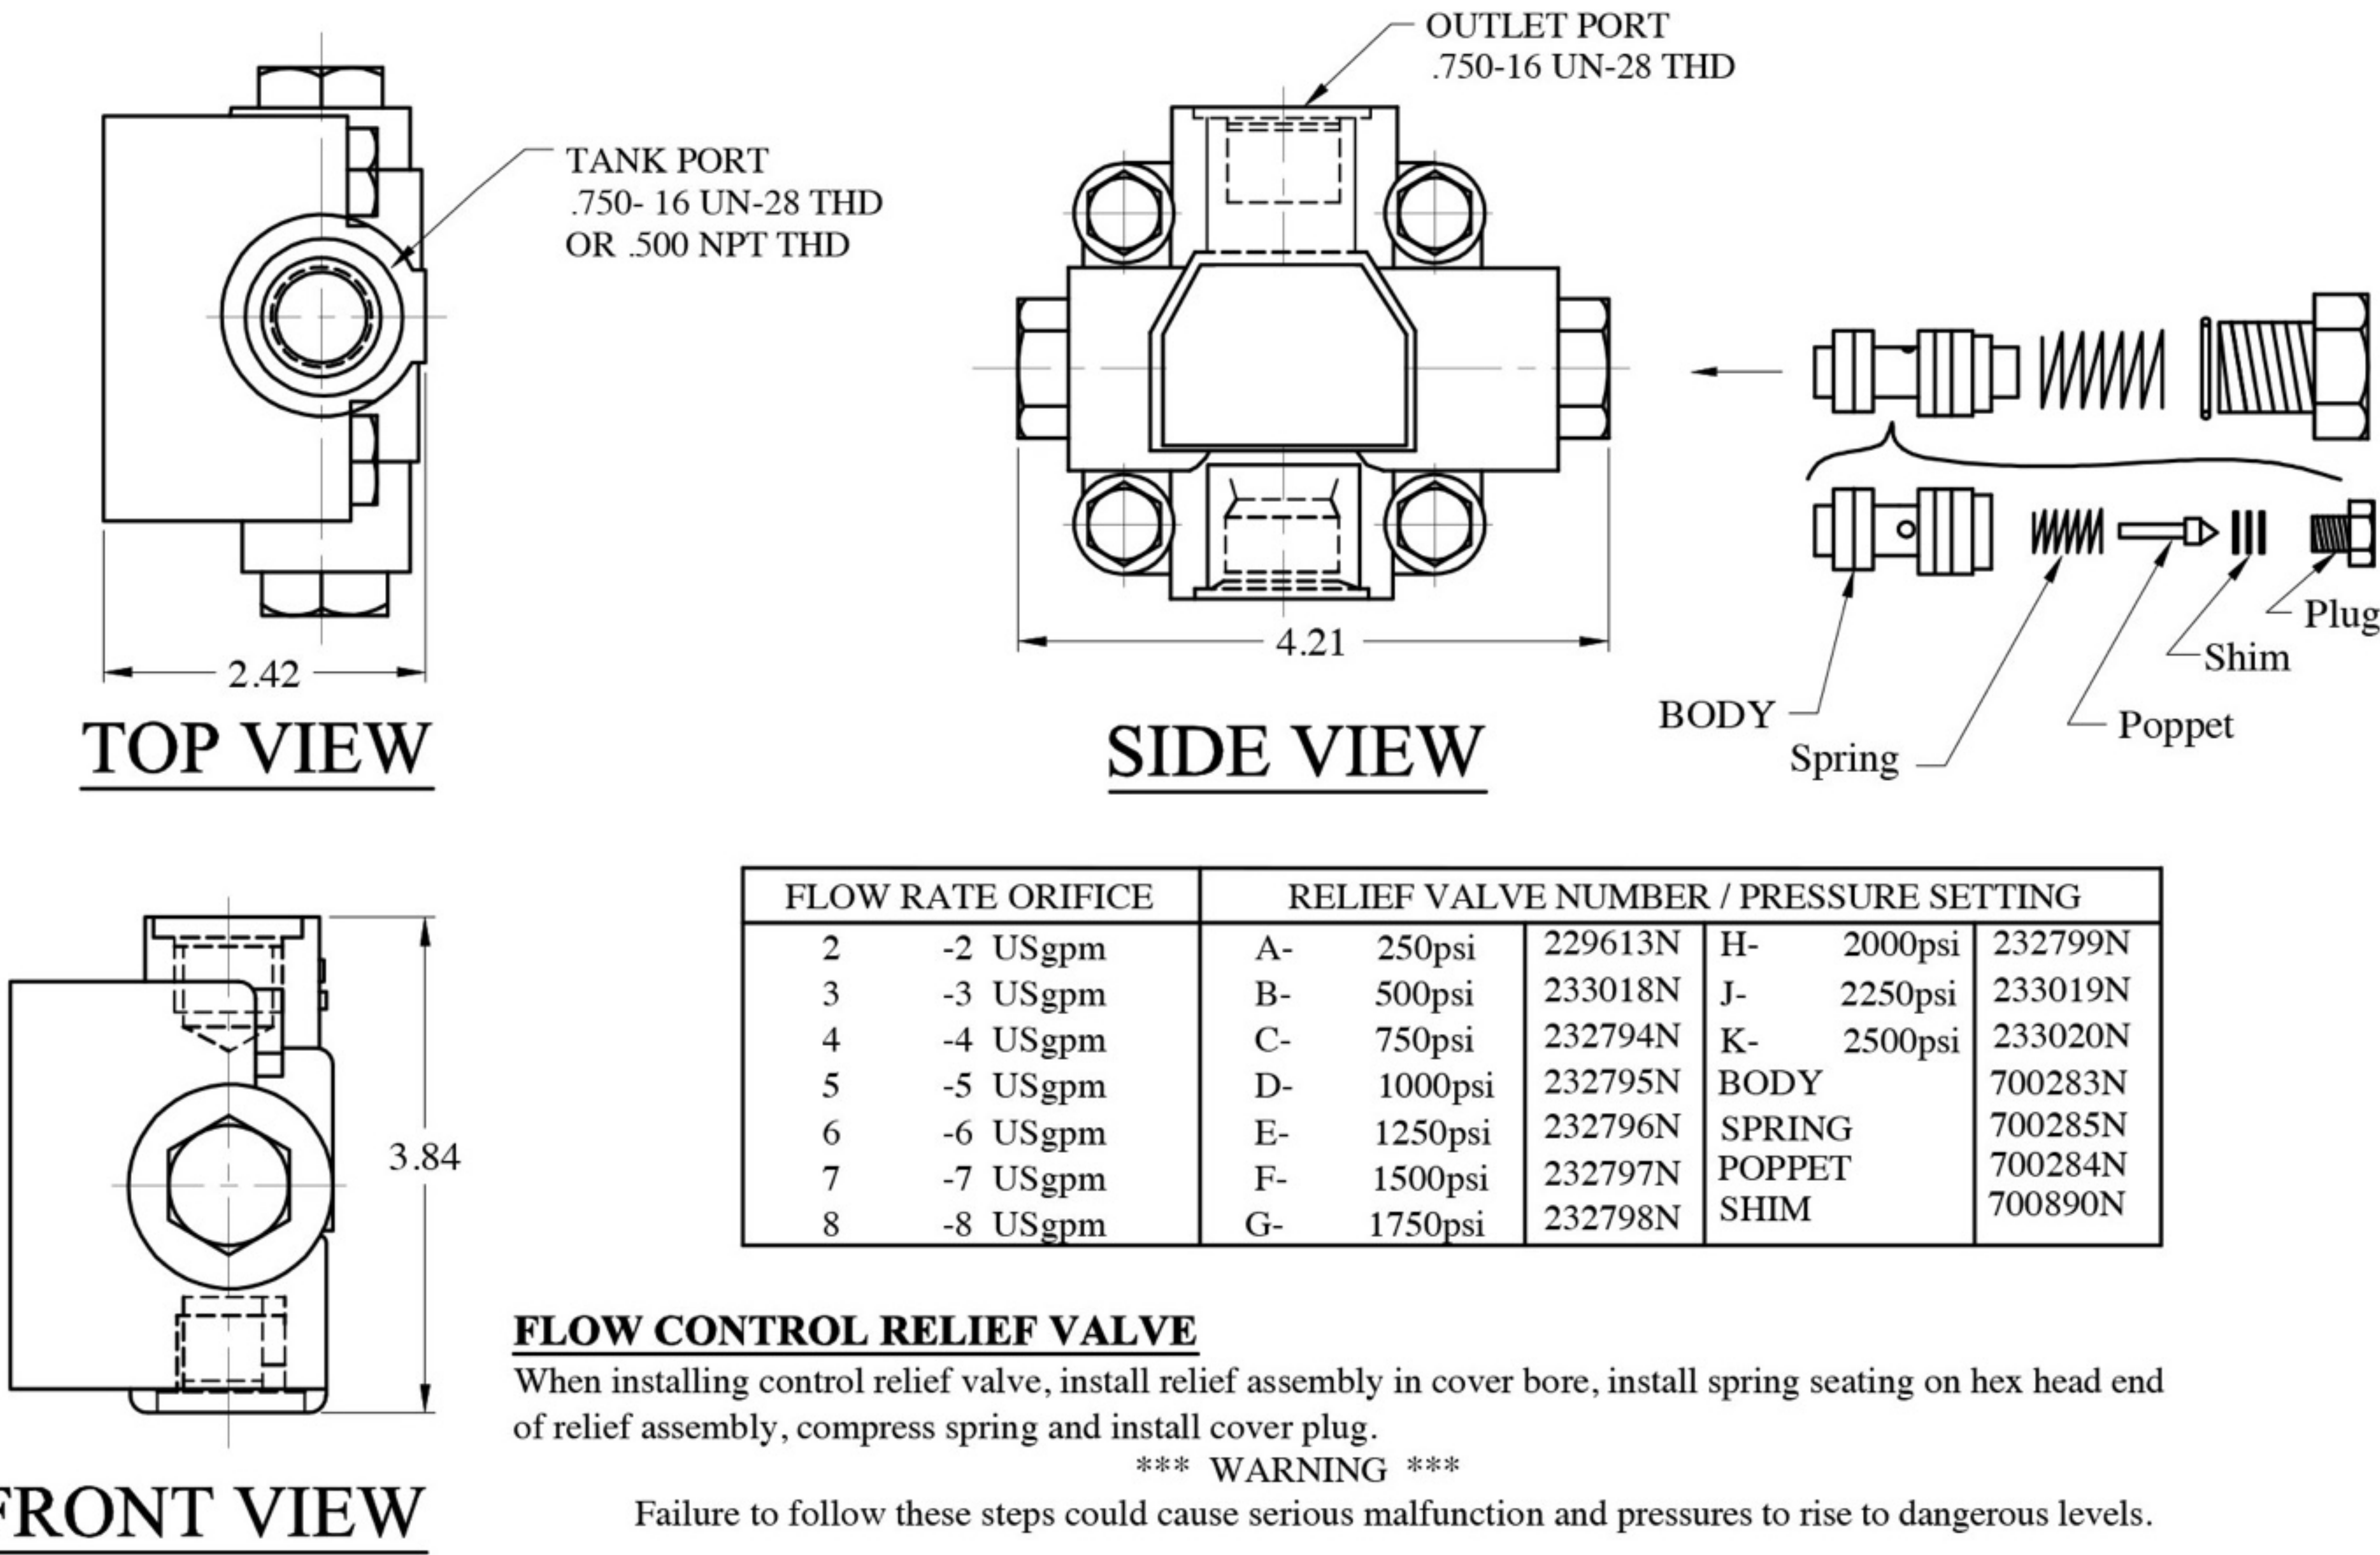

V20F
PART NUMBER
316090N

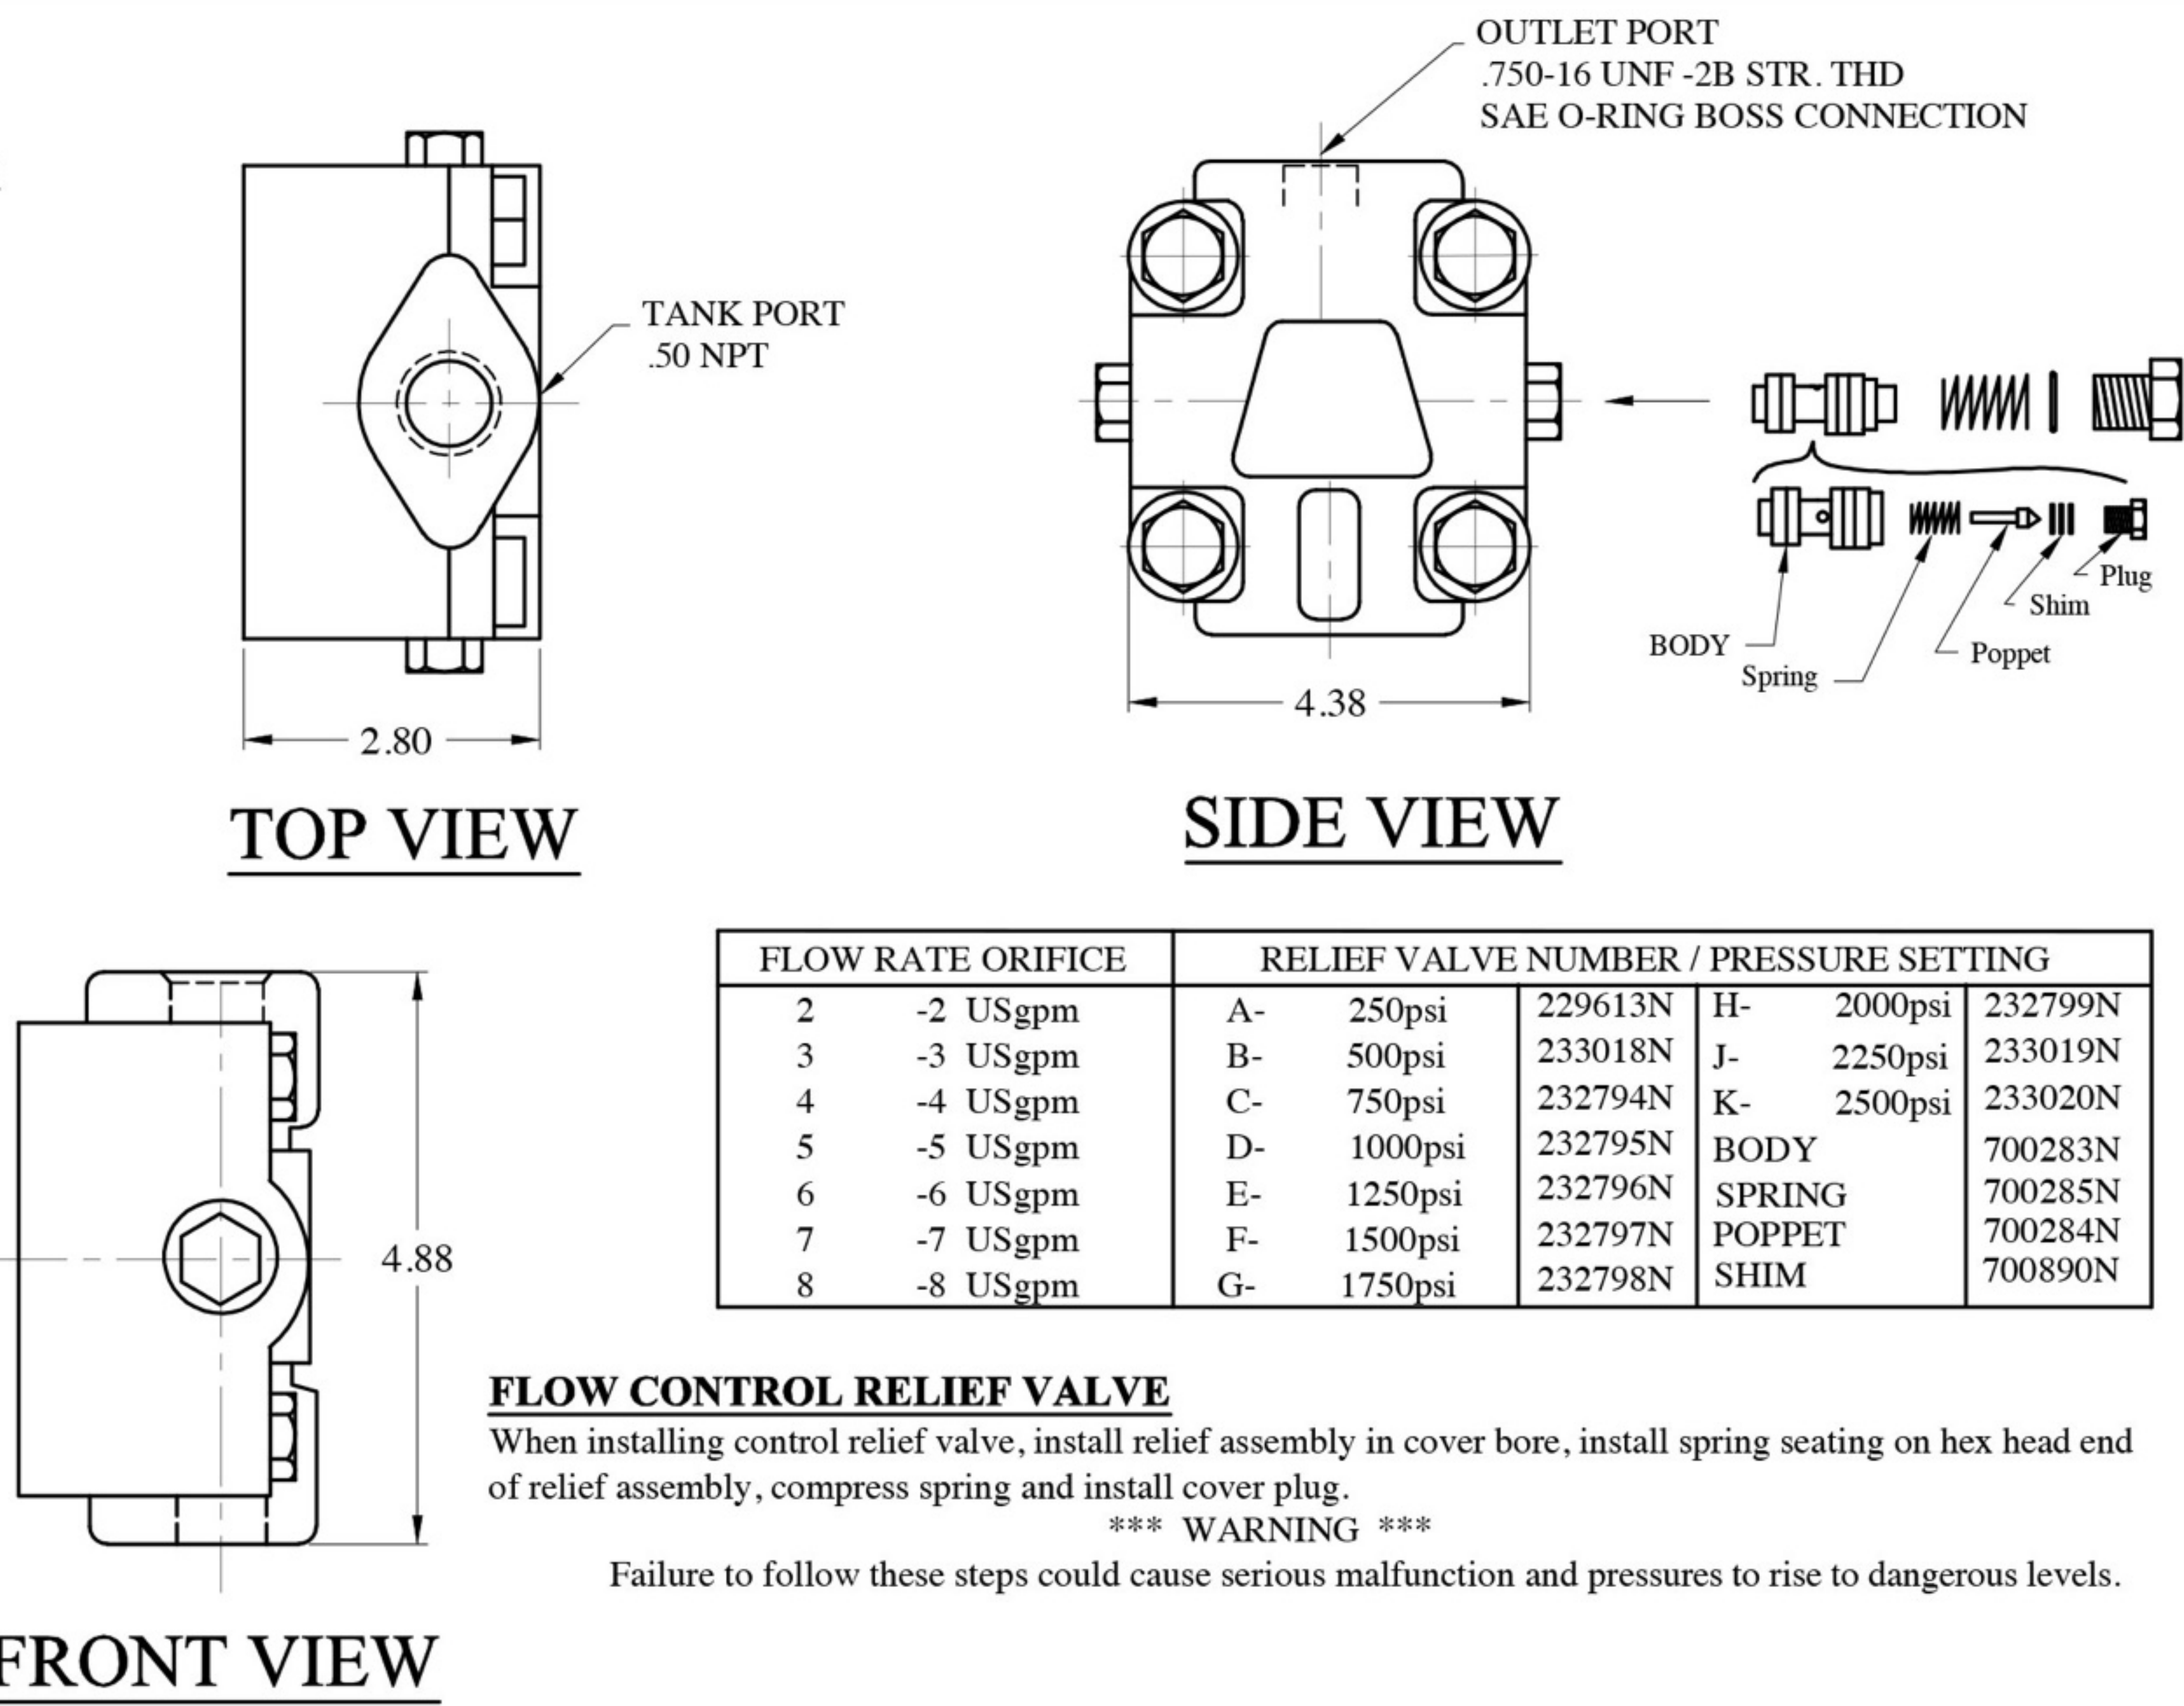


PRIORITY COVER

V10P/V20P


V10P

PART NUMBER
388262N

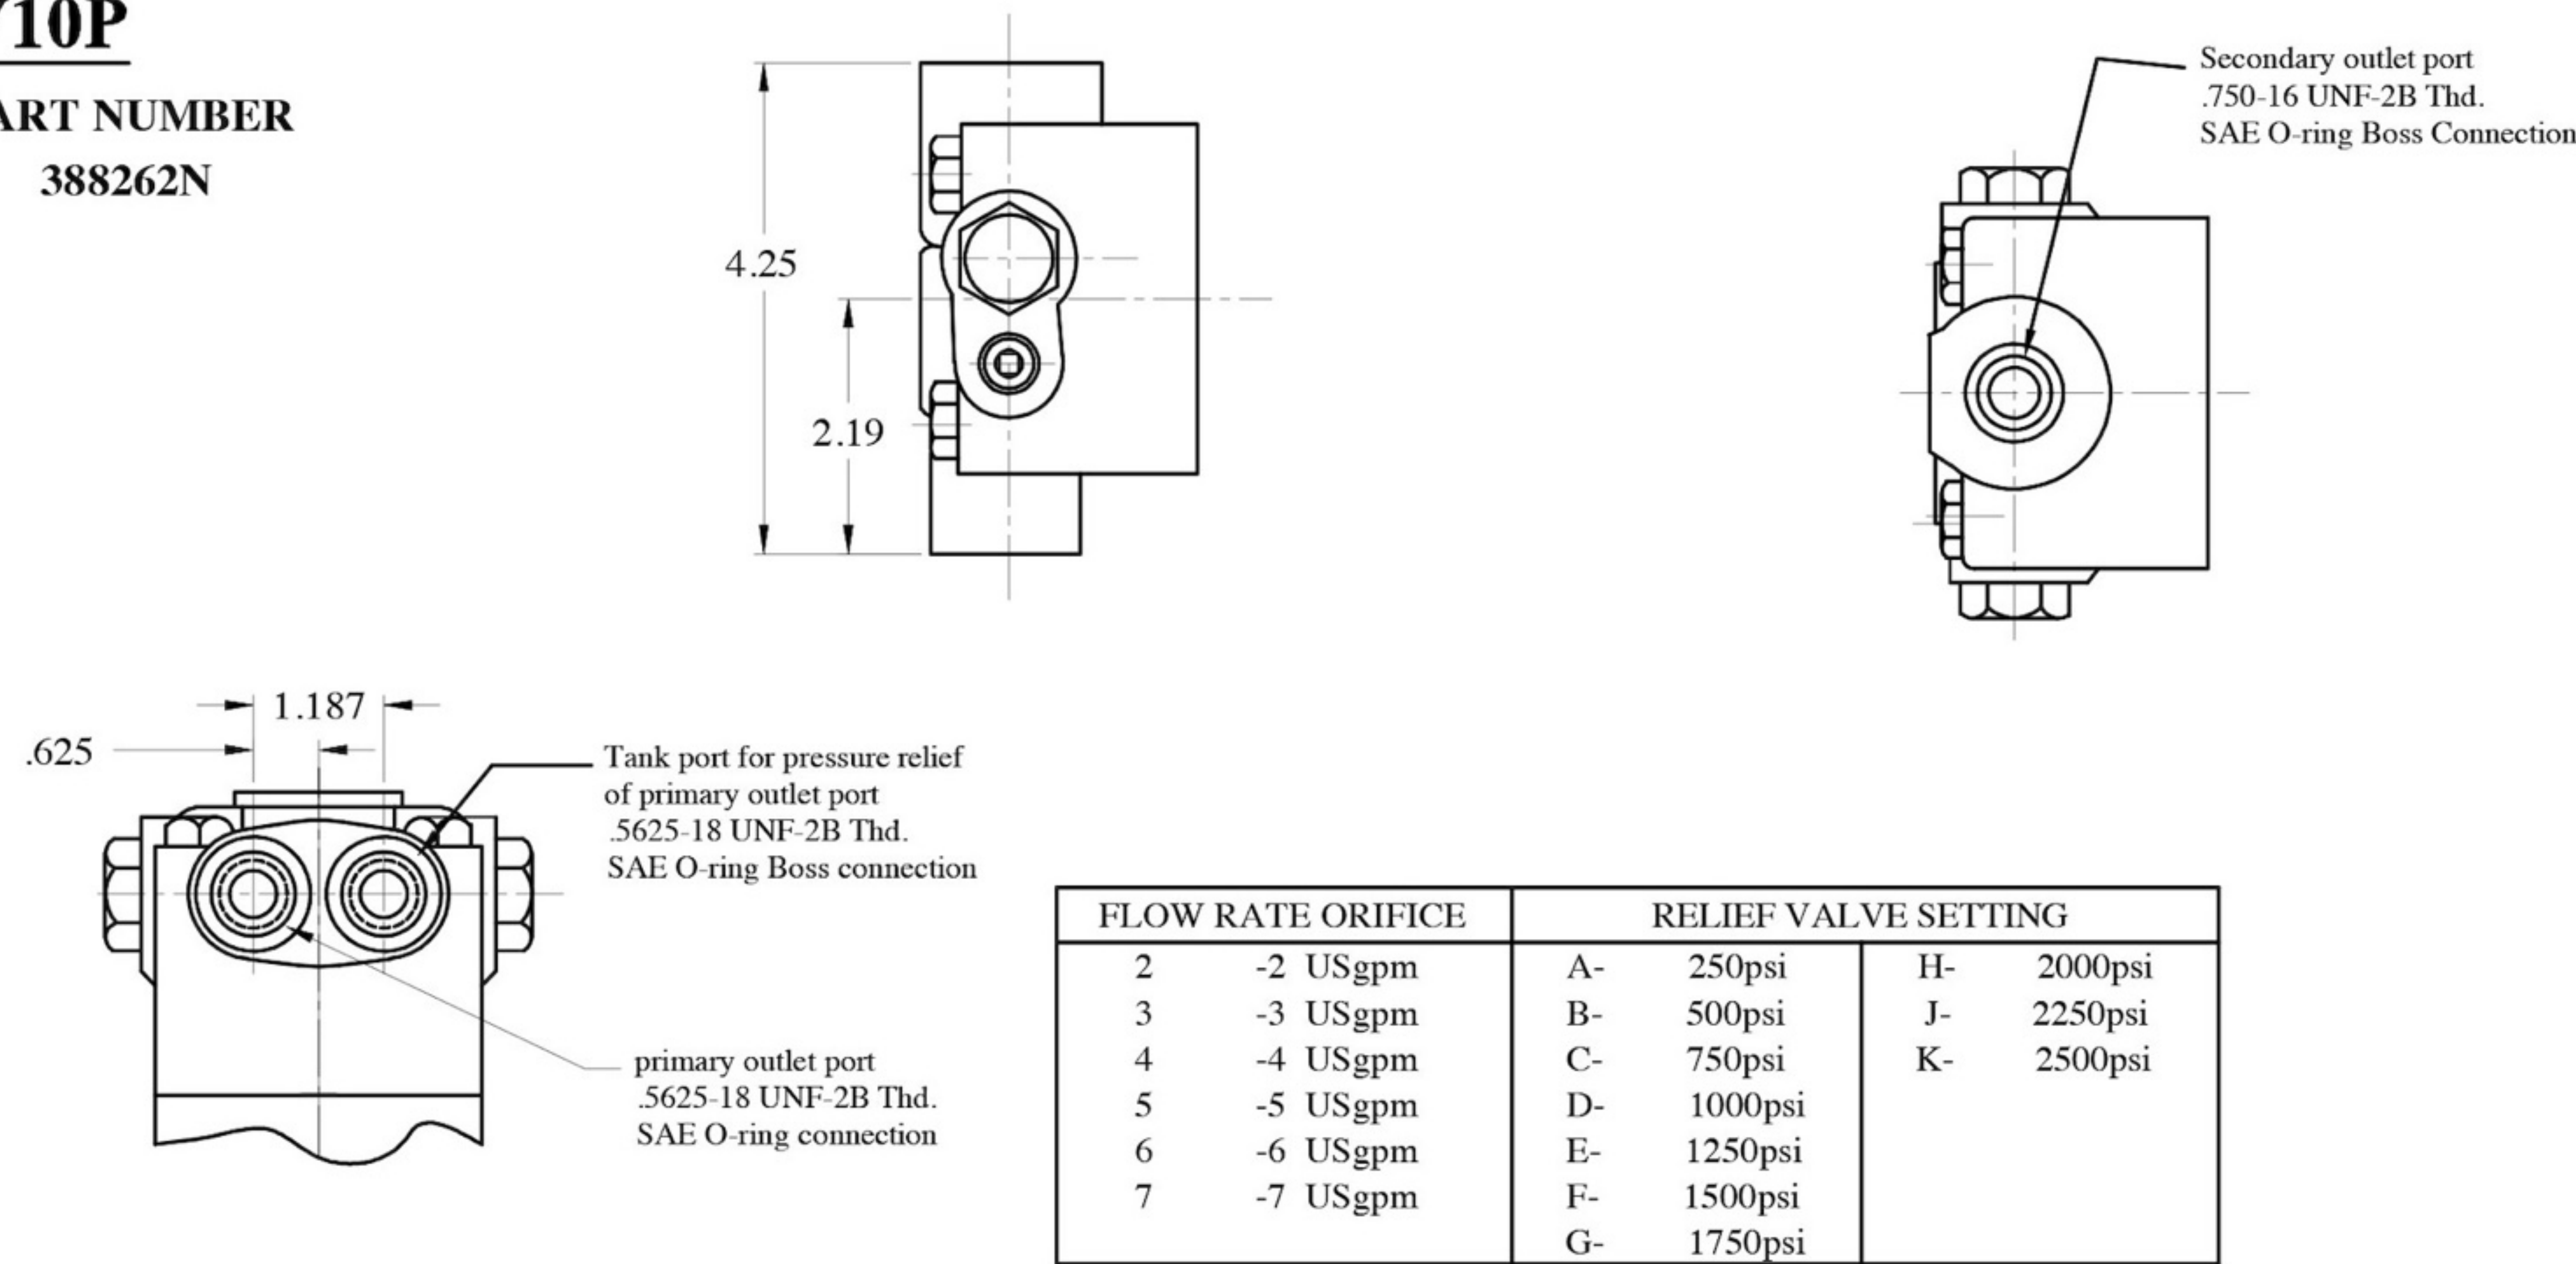

V20P

PART NUMBER
308121N

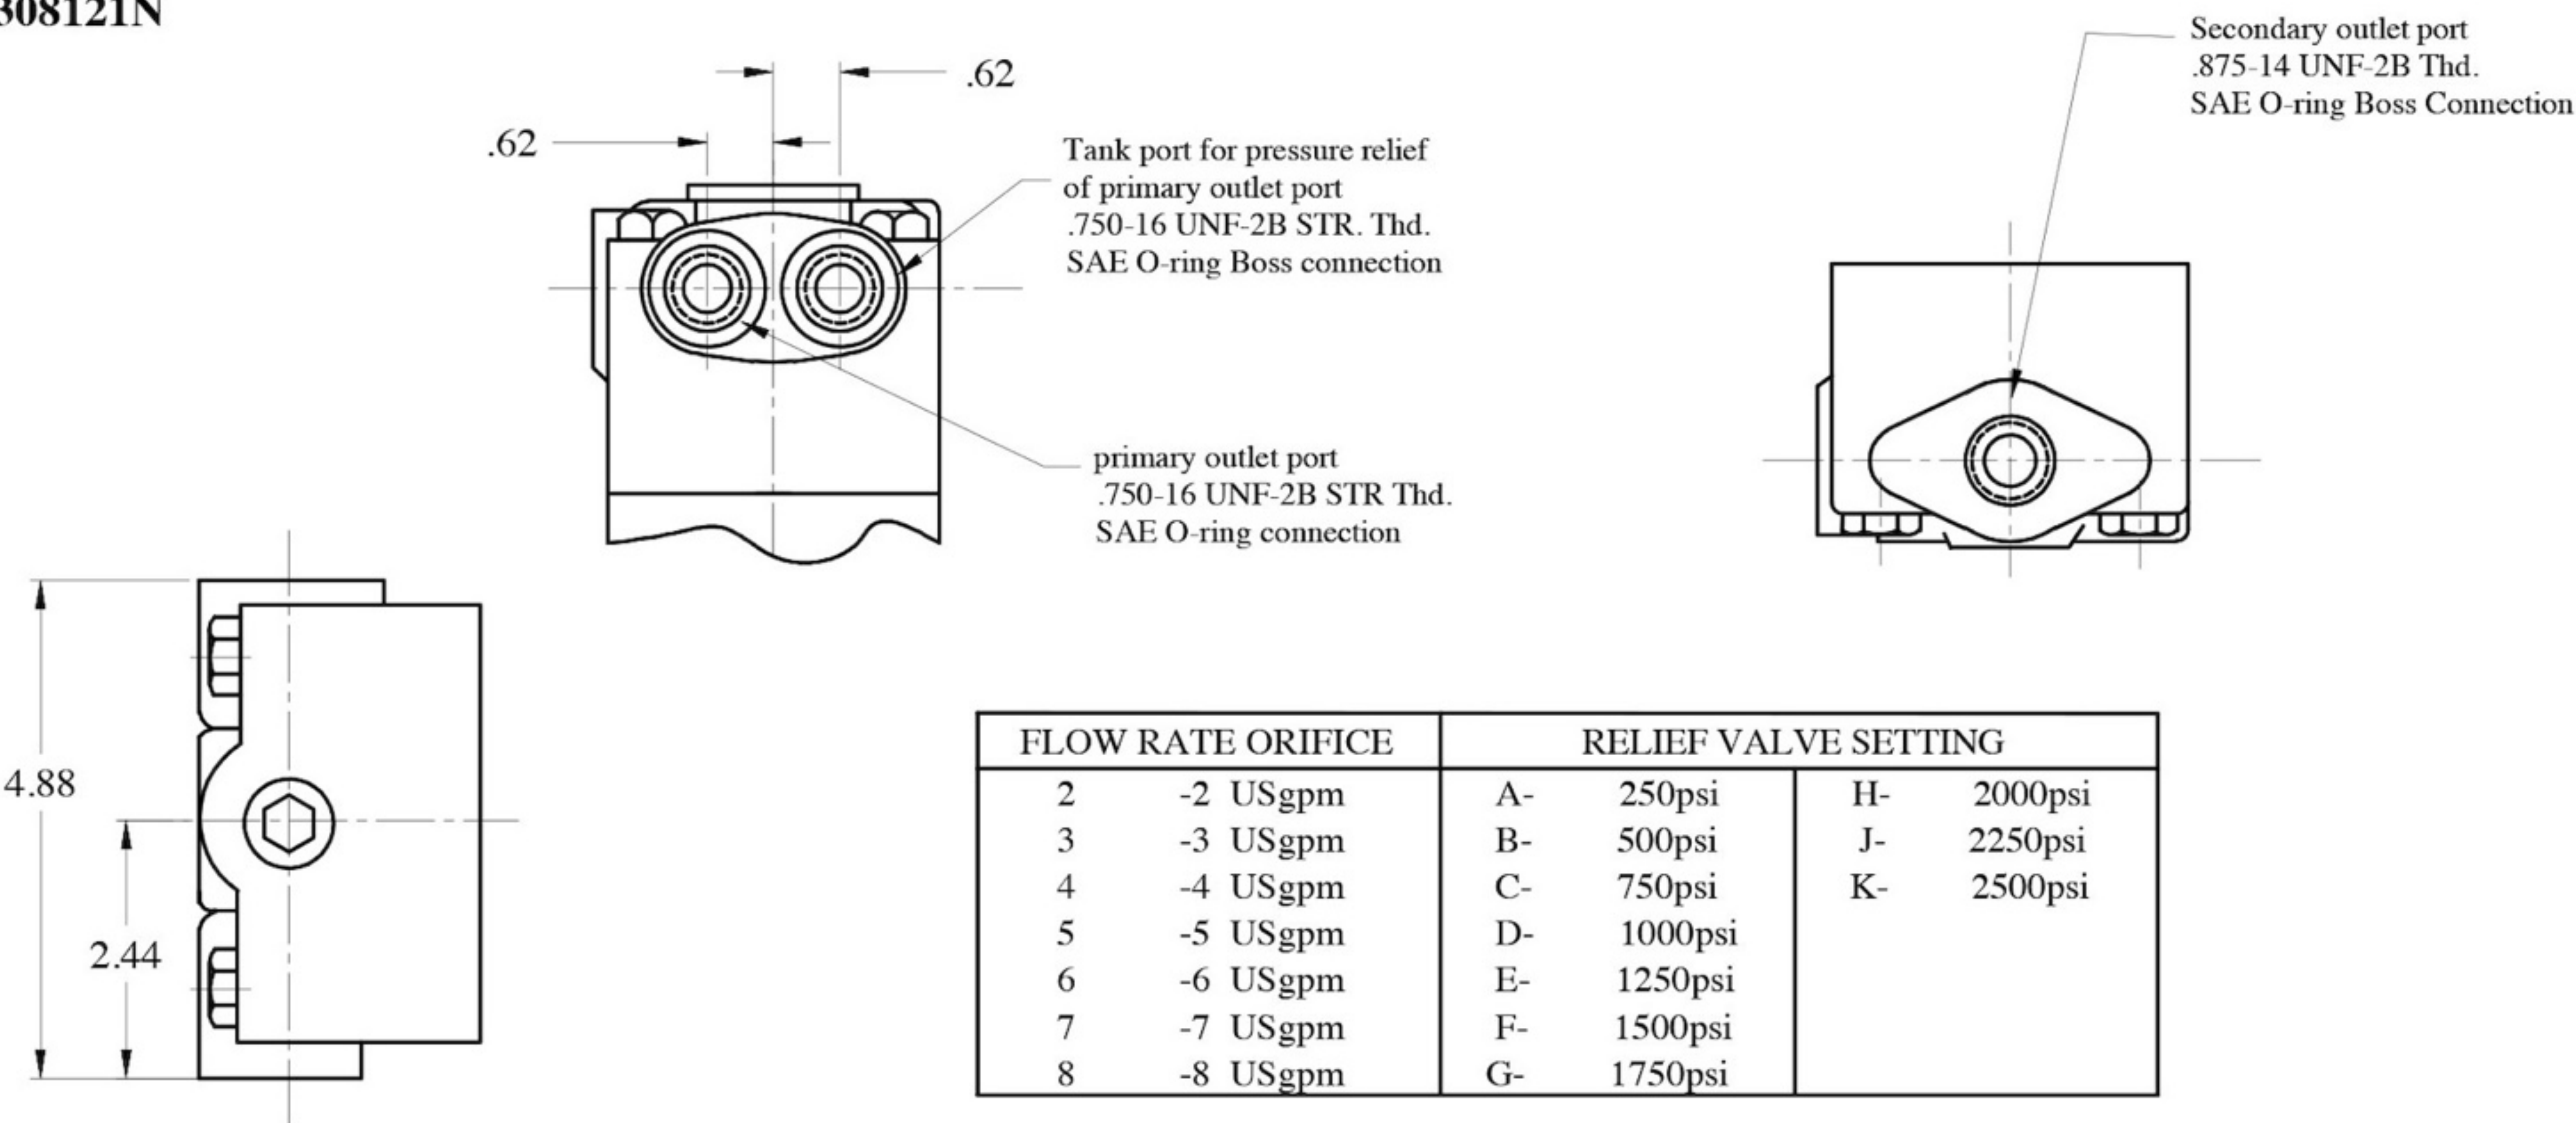



Deson Dynamics

A Recognized Global Leading Provider of High Quality Hydraulic Components



Products We Offer

- Inline Piston Pumps
- Radial Piston Pumps & Motors
- Bent Axis Piston Pumps & Motors
- Fixed Volume Vane Pumps
- Variable Volume Vane Pumps
- Gear Pumps
- Vane Motors
- Axial Piston Motors
- High Speed Motors
- Servo Motors
- Orbital Motors
- Directional Valves
- Flow Control Valves
- Pressure Control Valves
- Relief Valves
- Check Valves
- Stack Valves
- Servo Valves
- Proportional Valves
- PTOs (Power Take-offs)
- Cylinders

Shanghai Deson Dynamics Technology Co., Ltd.
No.2777 E Jinxiu Rd, Shanghai City, 202100, China
www.desondynamics.com
support@desondynamics.com

All manufacturers names, symbols and descriptions in this document are used for reference purposes only, and it is not implied that any parts listed is the product of these manufacturers.